
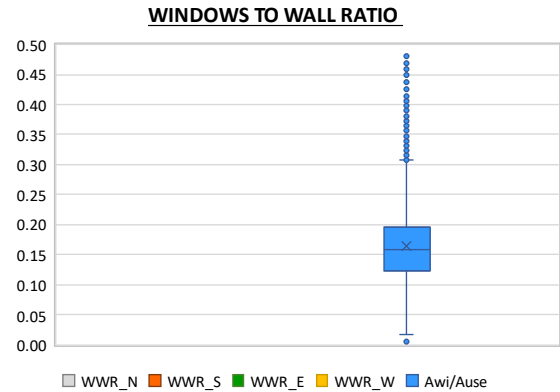




Region:	Piedmont					Archetype code: RES_APPBLOCK_1941-1950_E_PIE		
Building category:	Residential buildings - Apartments (in multifamily blocks)							
Period of construction:	1941-1950							
Climatic zone:	E	Number of records:			16087			
Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): External walls: solid brick masonry (cod. MLP01) or hollow brick masonry with air gap (cod. MCV01). Roof slabs: concrete floor slab (cod. SOL06).							Data sources: EPC databases (100%)	
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
BUILDING GEOMETRY	Number of floors	n_f	-	-	-	-	-	-
	Gross height	H_g	m	-	-	-	-	-
	Footprint area	$A_{\text{footprint}}$	m ²	-	-	-	-	-
	Heated gross floor area	$A_{H,g}$	m ²	-	-	-	-	-
	Heated net floor area	$A_{H,n}$	m ²	-	-	-	-	-
	Heated gross volume	$V_{H,g}$	m ³	-	-	-	-	-
	Heated net volume	$V_{H,n}$	m ³	-	-	-	-	-
	Compactness ratio	$A_{\text{env}}/V_{H,g}$	m ⁻¹	0.58	0.29	0.35	0.58	0.74
	WWR – North orientation	WWR_N	-	-	-	-	-	-
	WWR – South orientation	WWR_S	-	-	-	-	-	-
	WWR – East orientation	WWR_E	-	-	-	-	-	-
	WWR – West orientation	WWR_W	-	-	-	-	-	-
	Window to useful floor area ratio	A_{wi}/A_{use}	-	0.16	0.07	0.12	0.16	0.20
ENVELOPE	Roof type	-						
	U-value of the roof	$U_{fi,up}$	W/(m ² ·K)	-	-	-	-	-
	External walls type	Solid Brick masonry: 62%; Hollow brick masonry: 35%; Unknown: 3%						
	U-value of the wall	U_{wi}	W/(m ² ·K)	-	-	-	-	-
	Slab on ground floor type	-						
	U-value of the floor	$U_{fi,lw}$	W/(m ² ·K)	-	-	-	-	-
	Windows type	-						
	U-value of the windows	U_W	W/(m ² ·K)	3.19	1.24	2.23	3.02	4.34
GAINS and VENTILATION	Shading system type	-						
	Occupancy density *	O_C	person/m ²	UNI EN 16798-1 - Table A.19				
	Lighting power density *	W_L	W/m ²	UNI EN 16798-1 - A.8.3				
	Equipment power density *	W_A	W/m ²	UNI EN 16798-1 - A.8.3				
	Type of ventilation	Natural: 100%						
THERMAL SYSTEMS	Air exchange rate *	n	h ⁻¹	0.30	0.00	0.30	0.30	0.30
	Heating system type	Autonomous: 65%; Centralized: 35%						
	Heating generator	-						
	Daily operating time of the heating system *	t_H	h	14.00	0.00	14.00	14.00	14.00
	Energy carrier	Natural Gas: 80%; Electricity: 7%; District heating: 5%; Solid biomass: 4%; LPG: 2%; Gas Oil: 2%						
	Heating emission sub-system	-						
	Cooling system type	-						
	Daily operating time of the cooling system *	t_C	h	-	-	-	-	-
	Cooling emission sub-system	-						
	DHW system type	Autonomous, coupled with heating: 50%; Autonomous, detached from heating: 40%; Centralized, coupled with heating: 9%; Centralized, detached from heating: 1%						
	DHW generator	-						
* These values are derived from UNI EN ISO Standards								

Region:	Piedmont	Archetype code: RES_APPBLOCK_1941-1950_E_PIE
Building category:	Residential buildings - Apartments (in multifamily blocks)	
Period of construction:	1941-1950	
Climatic zone:	E	
Number of records:		16087





Numerical variables – GEOMETRY

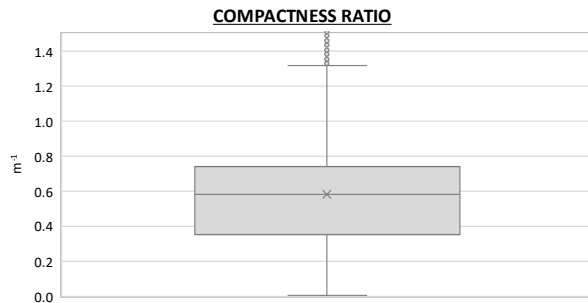

Numerical variables – ENVELOPE

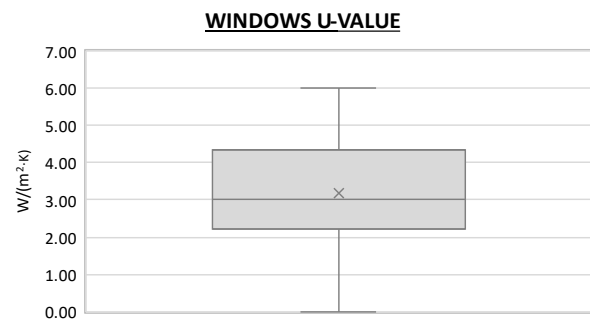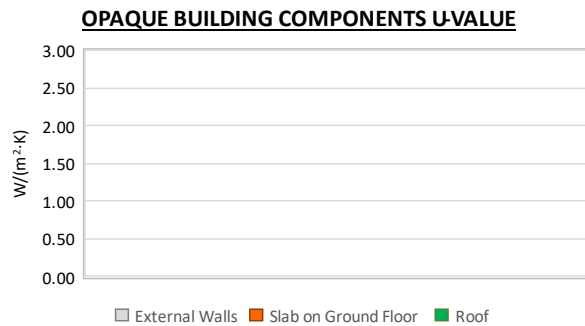

Numerical variables – GAINS, VENTILATION and SYSTEMS USAGE

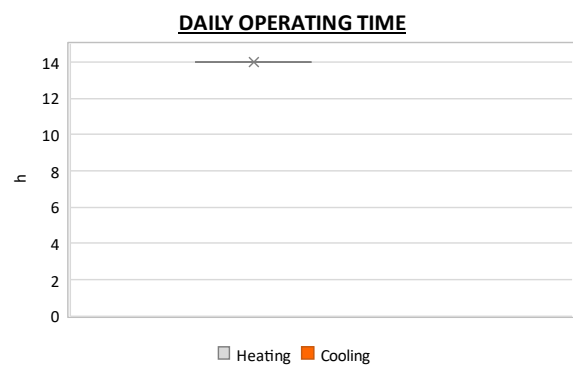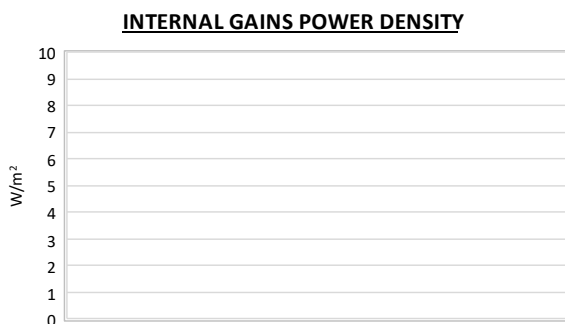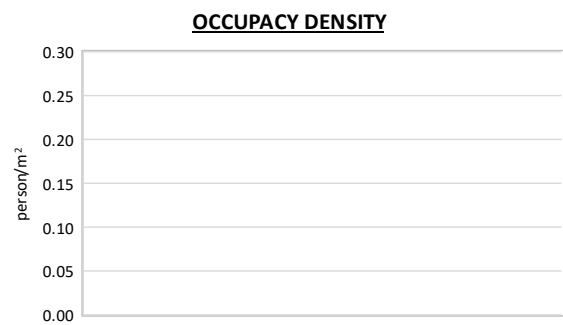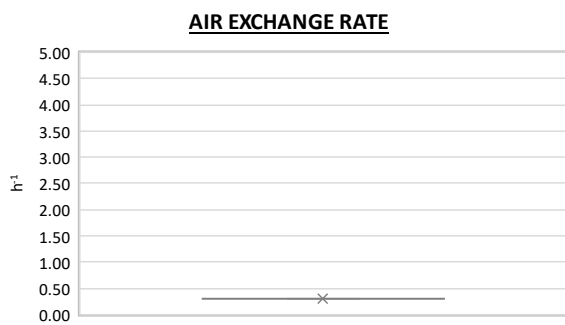


Region:	Piedmont			Archetype code: RES_APPBLOCK_1941- 1950_E_PIE
Building category:	Residential buildings - Apartments (in multifamily blocks)			
Period of construction:	1941-1950			
Climatic zone:	E	Number of records:	16087	

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
GEOMETRY: apartments	Inter-storey height	H_n	m	-	-	-	-	-
	Heated gross floor area	$A_{H,g}$	m ²	-	-	-	-	-
	Heated net floor area	$A_{H,n}$	m ²	76.3	43.6	48.2	65.5	90.5
	Heated gross volume	$V_{H,g}$	m ³	309.5	182.0	196.2	264.0	365.9
	Heated net volume	$V_{H,n}$	m ³	-	-	-	-	-
THERMAL SYSTEMS	Heating efficiency or <i>COP</i>	$\eta_{H,gen}$ or $COP_{H,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total heating power *	$P_{H,gen}$	kW	23.6	6.3	23.3	24.0	26.0
	Cooling efficiency or <i>EER</i>	$\eta_{C,gen}$ or $EER_{C,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total cooling power *	$P_{C,gen}$	kW	5.6	4.9	2.8	3.9	6.0
	Temperature of DHW	ϑ_w	°C	40.0	0.0	40.0	40.0	40.0
	DHW system power *	$P_{W,gen}$	kW	18.5	10.0	12.0	23.6	24.3

* These values refer to the apartment scale

Additional data: GEOMETRY (the plots refer to the apartment scale)

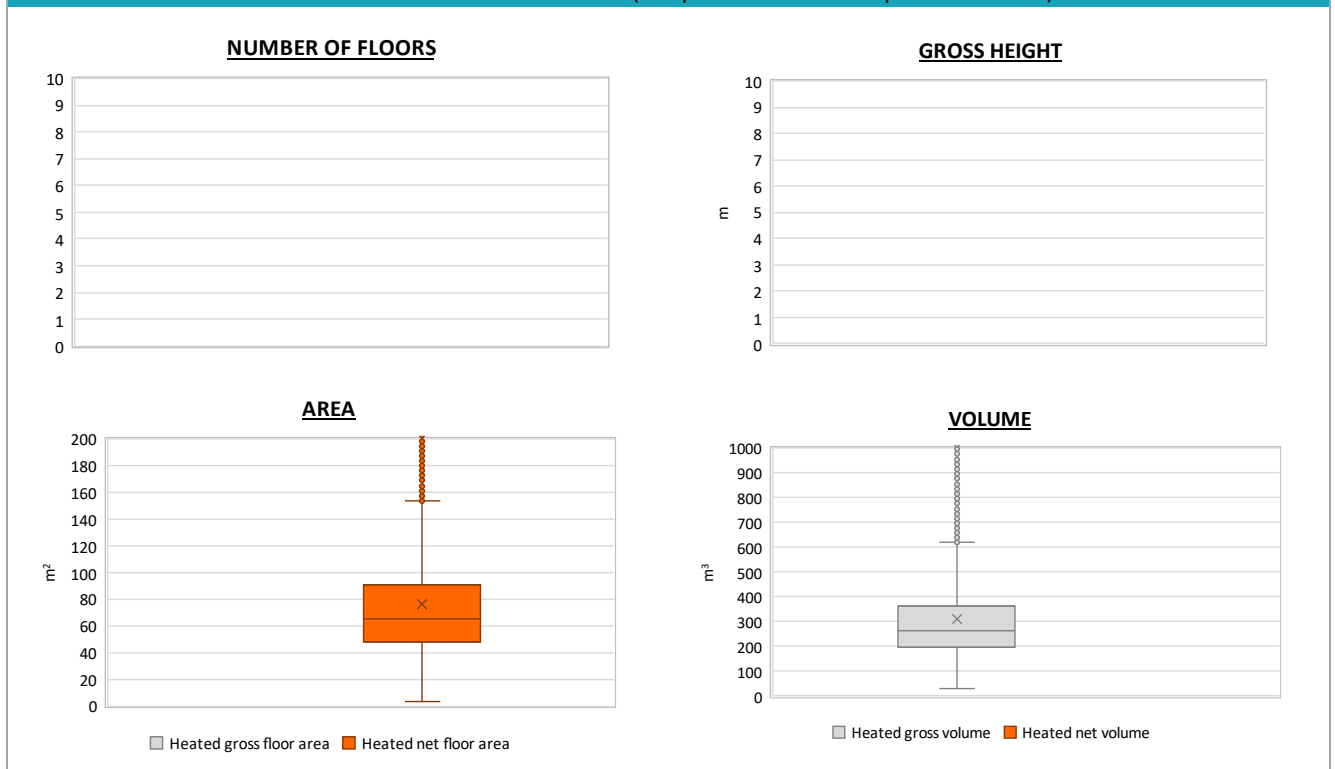


Region:	Piedmont	Archetype code: RES_APPBLOCK_1941- 1950_E_PIE
Building category:	Residential buildings - Apartments (in multifamily blocks)	
Period of construction:	1941-1950	
Climatic zone:	E	
Number of records:		16087

Additional data: other numerical variables that are not included in the archetype


DHW SUPPLY TEMPERATURE




SYSTEM POWER

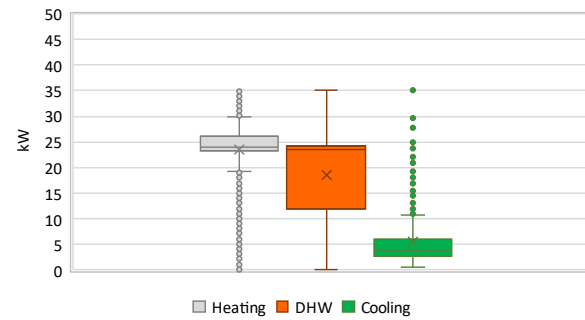


CO₂ EMISSION

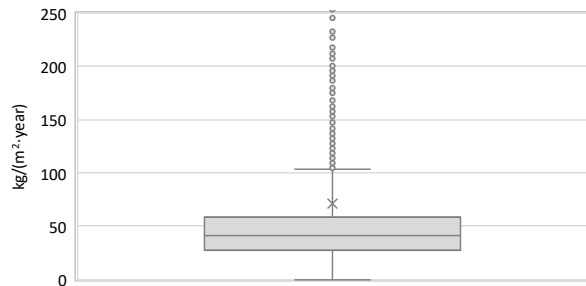

HEATING SYSTEM INSTALLATION YEAR

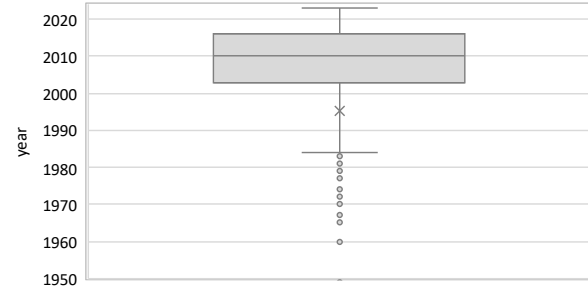

NON-RENEWABLE PRIMARY ENERGY USE

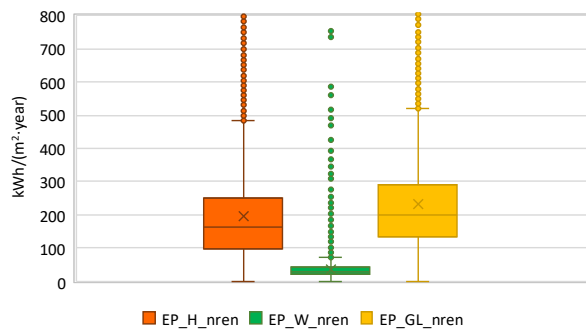

RENEWABLE PRIMARY ENERGY USE

