

Region:		Trentino Alto Adige						Archetype code:		
Building category:		Commercial b	ouildings	COMM_1991-2000_E_TN						
Period of construction:		1991-2000								
Climatic zone: E		Number of records: 288								
Description (the codes associated with walls		s and slabs re	fer to the structu			11552:2014):	Data s	ources:		
<u>External walls:</u> no data available <u>Roof slabs</u> : no data available		· · · · · · · · · · · · · · · · · · ·					APE (100%)			
	Data		Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)	
	Number of floors		nf	-	-	-	-	-	-	
	Gross height		Hg	m	-	-	-	-	-	
	Footprint area		A _{footprint}	m²	-	-	-	-	-	
	Heated gross floor area		A _{H;g}	m²	-	-	-	-	-	
BUILDING GEOMETRY	Heated net floor area		A _{H;n}	m ²	320	663	88	133	275	
	Heated gross volume		V _{H;g}	m ³	-	-	-	-	-	
	Heated net volume		V _{H;n}	m ³	1593	3778	356	591	1185	
	Compactness ra	itio	A _{env} /V _{H;g}	m ⁻¹	0.56	0.19	0.42	0.54	0.67	
	WWR – North orientation		WWR _N	-	-	-	-	-	-	
	WWR – South o	rientation	WWRs	-	-	-	-	-	-	
	WWR – East orientation		WWRE	-	-	-	-	-	-	
	WWR – West orientation		WWR _w	-	-	-	-	-	-	
	Window to useful floor area		A _{wi} /A _{use}	-	-	-	-	-	-	
	Roof type			1	1	-	1	1		
	<i>U</i> -value of the roof		U _{fl;up}	W/(m ² ·K)	-	-	-	-	-	
	External walls ty				1	-	1	1		
ΒE	U-value of the w	vall	U _{wl}	W/(m ² ·K)	-	-	-	-	-	
ENVELOPE	Slab on ground floor type				1	-	1	1		
N	U-value of the f		U _{fl;lw}	W/(m²·K)	-	-	-	-	-	
_	Windows type					-	1			
	<i>U</i> -value of the windows		Uw	W/(m²·K)	-	-	-	-	-	
	Shading system type					-				
z	Occupancy density *		Oc person/m ² UNI EN 16798-1 - Table A.19							
and TION	Lighting power density *		WL	W/m ²	UNI EN 16798-1 - A.8.3					
NS 8	Equipment pow	Equipment power density *		WA W/m² UNI EN 16798-1 - A.8.3						
GAINS a	Type of ventilat	Type of ventilation		Natural: 100%						
° ₽	Air exchange rate *		n h ⁻¹ UNI EN 16798-1							
	Heating system type		Unknown: 46%, Autonomous: 38%, Centralized: 16%							
	Heating generator		Boiler (Unknown type): 52%, Traditional boiler: 18%; Air source heat pump: 10%, Condensing boiler: 10%, Unknown: 6%, DHC: 4%							
THERMAL SYSTEMS	Daily operating heating system		t _H	h	14	-	14	14	14	
	Energy carrier			Natural gas: 92%, Electricity: 4%, District heating: 2%, Gas Oil: 1%, Electricity from PV, wind turbines, hydraulic turbines: 1%						
	Heating emission sub-system		-							
	Cooling system type			Unknow	n: 87%, Air	-cooled chiller	12%, Water-co	oled chiller: 1%		
	Daily operating time of the cooling system *		t _C	h	-	-	-	-	-	
F	Cooling emission sub-system		·							
	DHW system typ	ре	Unknown: 33%, Autonomous - detached from heating: 33%, Autonomous – coupled with heating: 27%, Centralized – coupled with heating: 6%, District heating: 1%							
	DHW generator	DHW generator Natural gas boiler: 34%, Unknown: 32%, Electric heat pump: 23%, Electric boiler:11%							iler:11%	
	* These values were not available in the considered sources, and are thus derived from UNI EN Standards									







C) (1)


The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Commercial buildings – 1991/2000 – Zone E – Trentino Alto Adige



Region:	Trentino Alto Adige	Archetype code:				
Building category:	uilding category: Commercial buildings			COMM_1991-2000_E_TN		
Period of construction:	1991-2000					
Climatic zone:	E	Number of records:	288			

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
THERMAL SYSTEMS	Heating efficiency or COP	$\eta_{ m H;gen}$ or $COP_{ m H;gen}$	-	This value has to be retrieved from suitable datasheets				
	Total heating power	P _{H;gen}	kW	69	132	24	26	39
	Cooling efficiency or EER	$\eta_{C;gen}$ or EER _{C;gen}	-	This value has to be retrieved from suitable datasheets				
	Total cooling power	P _{C;gen}	kW	64	141	5	14	53
	Temperature of DHW	ϑw	°C	40	-	40	40	40
	DHW system power	P _{W;gen}	kW	-	-	-	-	-

Additional data: GEOMETRY

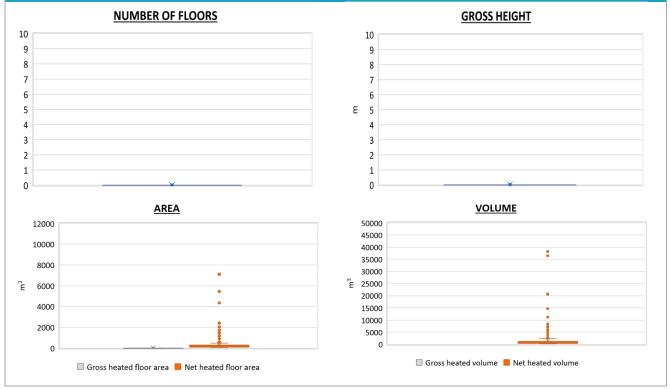



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Commercial buildings – 1991/2000 – Zone E – Trentino Alto Adige



