

Region: Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre) Archetype code: **Building category:** Non-residential buildings – Educational buildings EDUC_1982-2005_E_VAL **Period of construction:** 1982-2005 **Climatic zone:** Number of records: Ε Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): Data sources:

External walls: hollow brick masonry with thermal insulation (cod. MCV02).


Roof slabs: insulated reinforced concrete floor slab for walkable flat roof (cod. COP03), for pitched roof (cod. CINO3) or insulated wooden floor slab for pitched roof (cod. CINO2).

EPC databases (100%)

	Data	Symbol	Unit of	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)		
BUILDING GEOMETRY	Number of floors	n _f	measure	value -	- ueviation	qual tile)	value -	- quartile)		
	Gross height	Hg	m	_	_	_	_	_		
	Footprint area	A _{footprint}	m ²	_	-	_	_	_		
	Heated gross floor area	A _{H;g}	m ²	-	-	-	_	-		
	Heated net floor area	A _{H;n}	m ²	2261.4	1964.8	586.9	2069.7	3744.2		
	Heated gross volume	V _{H;g}	m³	9612.6	8287.5	2483.4	9505.0	16634.2		
	Heated net volume	V _{H;n}	m³	6321.9	5333.2	1954.5	5284.6	9652.0		
9	Compactness ratio	A _{env} /V _{H;g}	m ⁻¹	0.57	0.18	0.45	0.59	0.71		
	WWR – North orientation	WWR _N	-	0.25	0.11	0.17	0.24	0.32		
틸	WWR – South orientation	WWR _S	-	0.25	0.11	0.17	0.24	0.32		
	WWR – East orientation	WWR _E	-	0.25	0.11	0.17	0.24	0.32		
	WWR – West orientation	WWR _W	-	0.25	0.11	0.17	0.24	0.32		
	Window to useful floor area ratio	A _{wi} /A _{use}	-	0.19	0.08	0.15	0.16	0.20		
	Roof type -									
	<i>U</i> -value of the roof **	U _{fl;up}	W/(m ² ·K)	0.23	0.07	0.21	0.23	0.26		
	External walls type	Hollow brick masonry: 75%; Unknown: 25%								
)PE	<i>U</i> -value of the wall	$U_{ m wl}$	W/(m²⋅K)	0.34	0.21	0.22	0.25	0.38		
ŒĽĊ	Slab on ground floor type									
ENVELOPE	<i>U</i> -value of the floor **	U _{fl;lw}	W/(m ² ·K)	0.79	0.76	0.36	0.51	1.08		
	Windows type	Double glazing, wooden frame: 50%; Double glazing, PVC frame: 25%; Double glazing, PVC frame: 25%								
	<i>U</i> -value of the windows	U_{W}	W/(m²⋅K)	2.67	0.22	2.50	2.62	2.79		
	Shading system type	-								
_ z	Occupancy density *	O _C person/m ² UNI EN 16798-1 - Table A.19								
GAINS and ENTILATIO	Lighting power density *	W_{L}	W/m ²	N/m ² UNI EN 16798-1 - A.8.3						
SN F	Equipment power density *	W_{A}	W/m ² UNI EN 16798-1 - A.8.3							
GAINS and VENTILATION	Type of ventilation		·							
>	Air exchange rate *	n	h ⁻¹	-	-	-	-	-		
	Heating system type	Autonomous: 100%								
	Heating generator	Boiler (unknown type): 100%								
	Daily operating time of the heating system *	t _H	h	14.0	0.0	14.0	14.0	14.0		
Ë	Energy carrier	Natural Gas: 100%								
YST	Heating emission sub-system	-								
THERMAL SYSTEMS	Cooling system type	Absent: 100%								
	Daily operating time of the cooling system *	t _C	h	-	-	-	-	-		
F	Cooling emission sub-system				-					
	DHW system type	Autonomous, detached from heating: 50%; Autonomous, detached from heating: 50%								
	DHW generator	Unknown: 100%								
	* These values are derived from UNI EN ISO Standards; ** <i>U</i> -values of the upper slab face the external environment, and the lower slab is in contact with the ground									



Region:	Aosta Valley (Aosta, Qua	Archetype code:		
Building category:	Non-residential building	EDUC_1982-2005_E_VAL		
Period of construction:	1982-2005			
Climatic zone:	E	Number of records:	14	

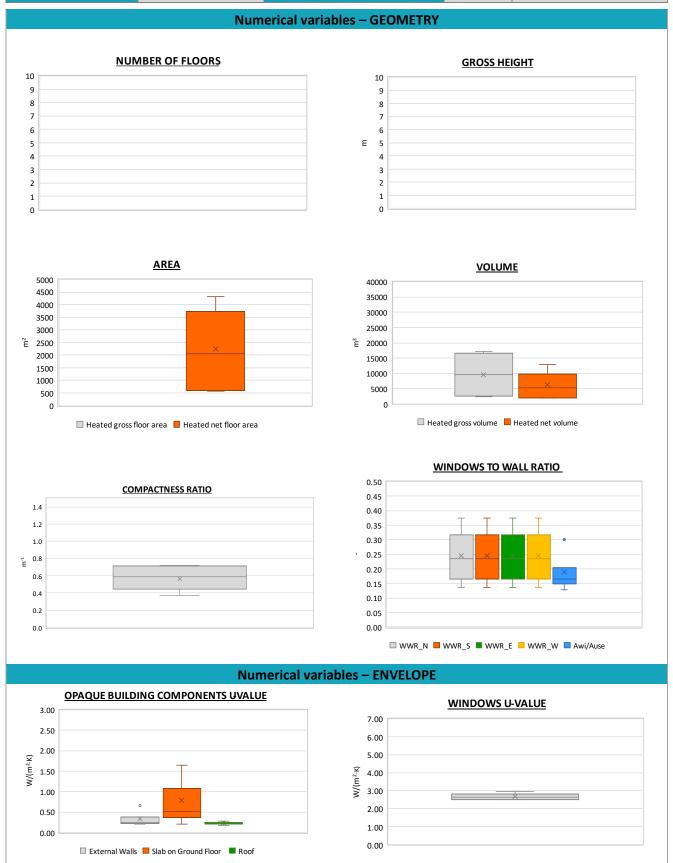

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.



 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Non-residential buildings – Educational buildings
 EDUC_1982-2005_E_VAL

 Period of construction:
 1982-2005

 Climatic zone:
 E
 Number of records:
 14

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or COP _{H;gen}	-	This value has to be retrieved from suitable datasheets				
	Total heating power	P _{H;gen}	kW	-	-	-	-	-
	Cooling efficiency or EER	$\eta_{ extsf{C}; extsf{gen}}$ or $ extsf{\textit{EER}}_{ extsf{C}; extsf{gen}}$	-	This value has to be retrieved from suitable datasheets				
	Total cooling power	P _{C;gen}	kW	-	-	-	-	-
	Temperature of DHW	∂w	°C	40.0	0.0	40.0	40.0	40.0
	DHW system power	P _{W;gen}	kW	32.0	36.8	19.0	32.0	45.0
	* This value refers to the building scale							

Numerical variables - GAINS, VENTILATION and SYSTEMS USAGE **AIR CHANGE RATE OCCUPACY DENSITY** 5.00 0.30 4.50 0.25 4.00 3.50 0.20 3.00 2.50 0.15 2.00 0.10 1.50 1.00 0.05 0.50 0.00 0.00 **DAILY OPERATING TIME INTERNAL GAINS POWER DENSITY** 14 10 12 9 8 10 5 6 4 3 2 2 1 0 ☐ Heating ☐ Cooling



Region:	Aosta Valley (Aosta, Qua	Archetype code:		
Building category:	Non-residential building	EDUC_1982-2005_E_VAL		
Period of construction:	1982-2005			
Climatic zone:	E	Number of records:	14	

