

Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014):

14):

External walls: no data available Roof slabs: no data available

Data sources: EPC databases (100%)

			ı						
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)	
BUILDING GEOMETRY	Number of floors	n _f	-	-	-	-	-	-	
	Gross height	Hg	m	-	-	-	-	-	
	Footprint area	A _{footprint}	m ²	-	-	-	-	-	
	Heated gross floor area	A _{H;g}	m ²	-	-	-	-	-	
	Heated net floor area	A _{H;n}	m ²	371	437	71	132	438	
	Heated gross volume	V _{H;g}	m³	-	-	-	-	-	
	Heated net volume	V _{H;n}	m³	1958	2045	320	551	1917	
	Compactness ratio	A _{env} /V _{H;g}	m ⁻¹	0.53	0.19	0.36	0.50	0.66	
	WWR – North orientation	WWR _N	-	_	-	-	-	-	
5	WWR – South orientation	WWR _S	-	-	-	-	_	_	
Φ.	WWR – East orientation	WWR _E	-	_	-	-	_	_	
	WWR – West orientation	WWR _W	-	_	-	-	_	_	
	Window to useful floor								
	area ratio	A_{wi}/A_{use}	-	-	-	-	-	-	
	Roof type				-				
	U-value of the roof	U _{fl;up}	W/(m ² ·K)	-	-	-	-	-	
	External walls type				-				
E	U-value of the wall	$U_{ m wl}$	W/(m²⋅K)	-	-	-	-	-	
ENVELOPE	Slab on ground floor type				-				
	<i>U</i> -value of the floor	U _{fl;lw}	W/(m²⋅K)	-	-	-	-	-	
	Windows type	.,,	, ,		-				
	U-value of the windows	U _W	W/(m²⋅K)	-	-	-	-	-	
	Shading system type				-				
	Occupancy density *	O _C person/m ² UNI EN 16798-1							
_B S	Lighting power density *	W _L	W/m ²	UNI EN 16798-1					
GAINS and VENTILATION	Equipment power density	W _A	W/m²						
GA FIN	Type of ventilation	Natural: 100%							
	Air exchange rate *	n							
	Heating system type	Centralized: 50%; Autonomous: 30%; Unknown: 20%							
THERMAL SYSTEMS	Heating generator	Boiler (unknown type): 87%; Unknown: 6%; Heat exchanger of district heating/cooling: 6%; Air-source heat pump: 1%							
	Daily operating time of the heating system *	t _H h No limitation							
	Energy carrier	Natural gas 50%; Gas oil: 26%; Solid biomass: 9%; District heating: 7%; LPG: 5%; Electricity from PV, wind turbines, hydraulic turbines: 2%; Electricity: 1%							
	Heating emission sub- system	-							
	Cooling system type	Unknown: 96%, Air-cooled chiller: 4%							
	Daily operating time of the cooling system *	t _C	h	No limitation					
	Cooling emission sub- system	-							
	DHW system type	Autonomous - detached from heating: 32%; Autonomous - coupled with heating: 25%; Centralized - coupled with heating: 18%; Unknown: 16%; District heating: 9%							
	DHW generator	N	latural gas boile	: 46%; Electric	Heat Pump: 27%	6; Unknown: 14	%; Electric boile	r: 13%	
	* These values were not available in	values were not available in the considered sources, and are thus derived from UNI EN Standards							





 Region:
 Trentino
 Archetype code:

 Building category:
 Office buildings
 OFF_

 Period of construction:
 <1930</td>
 -1930_F_TN


 Climatic zone:
 F
 Number of records:
 208





Region:	Trentino	Archetype code:		
Building category:	OFF_			
Period of construction:	-1930_F_TN			
Climatic zone:	F	Number of records:	208	

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or <i>COP</i> _{H;gen}	-	This value has to be retrieved from suitable datasheets				
	Total heating power *	P _{H;gen}	kW	74	78	26	35	99
	Cooling efficiency or EER	$\eta_{ extsf{C};gen}$ or $\mathit{EER}_{ extsf{C};gen}$	-	This value has to be retrieved from suitable datasheets				
	Total cooling power *	P _{C;gen}	kW	36	15	5	10	22
	Temperature of DHW	ϑ_{W}	°C	-	-	-	-	-
	DHW system power *	P _{W;gen}	kW	-	-	-	-	-

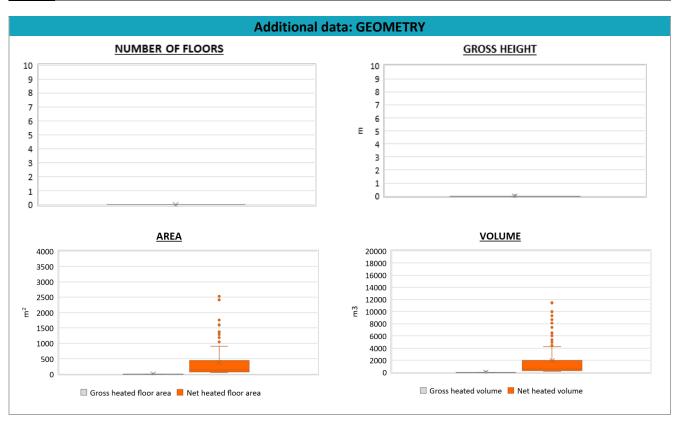



Region:	Trentino	Archetype code:		
Building category:	OFF_			
Period of construction:	-1930_F_TN			
Climatic zone:	F	Number of records:	208	

