

Region:
Liguria
Archetype code:

Building category:
Residential buildings – Apartments in multi-family block
Period of construction:
1971-1980
Climatic zone:
F
Number of records:
110

Description: Data sources:

External walls: no data available Roof slabs: no data available

EPC databases (100%)

| | Data | Symbol | Unit of | Mean | Standard | Q1 (first | Q2 (Median | Q3 (third | | |
|-----------------------|--|--|---|--|-----------|-----------|------------|-----------|--|--|
| BUILDING GEOMETRY | Number of floors | n _f | measure - | value - | deviation | quartile) | value) | quartile) | | |
| | Gross height | Hg | m | _ | _ | | _ | | | |
| | Footprint area | | m ² | _ | _ | | _ | | | |
| | Heated gross floor area | A _{footprint} | m ² | _ | - | | - | | | |
| | Heated net floor area | A _{H;g} | m ² | - | - | | - | | | |
| | Heated gross volume | A _{H;n} V _{H;g} | m ³ | - | _ | | - | | | |
| | Heated net volume | V _{H;n} | m ³ | _ | - | | - | <u>-</u> | | |
| | Compactness ratio | A _{env} /V _{H;g} | m ⁻¹ | 0.66 | 0.26 | 0.46 | 0.66 | 0.80 | | |
| | WWR – North orientation | WWR _N | - | 0.00 | 0.20 | 0.40 | 0.00 | 0.80 | | |
| Ę | WWR – South orientation | WWR _S | - | _ | _ | | _ | | | |
| 置 | WWR – East orientation | WWR _E | | - | - | | - | | | |
| | WWR – West orientation | WWR _w | - | - | - | - | - | | | |
| | Window to useful floor area ratio | A _{wi} /A _{use} | <u>-</u> | - | - | - | - | <u> </u> | | |
| | Roof type | | | | | | | | | |
| | U-value of the roof | U _{fl;up} | W/(m²·K) | 1.38 | 0.97 | 0.57 | 1.49 | 1.79 | | |
| | External walls type | Oti;up | VV/(III 'K) | 1.30 | 0.97 | 0.57 | 1.49 | 1.79 | | |
| 핓 | <i>U</i> -value of the wall | U _{wl} | W/(m²·K) | 1.14 | 0.49 | 0.89 | 1.13 | 1.40 | | |
| ENVELOPE | Slab on ground floor type | O _{WI} | vv/(iii ix) | 1.14 | 0.45 | 0.63 | 1.13 | 1.40 | | |
| Š | U-value of the floor | U _{fl;lw} | W/(m²·K) | _ | _ | _ | _ | | | |
| ⊞ | Windows type | Off;lw | vv/(iii ·k) | _ | | | | | | |
| | <i>U</i> -value of the windows | U _W | W/(m²·K) | 4.26 | 1.28 | 3.40 | 4.54 | 5.31 | | |
| | Shading system type | l Ow | vv/(iii ix) | 4.20 | 1.20 | 3.40 | 4.54 | 3.31 | | |
| | Occupancy density * | UNI EN 16798-1 - Table A.19 | | | | | | | | |
| GAINS and VENTILATION | Lighting power density * | W _L | W/m ² | UNI EN 16798-1 - Table A.19 UNI EN 16798-1 - A.8.3 | | | | | | |
| S al | Equipment power density * | W _A | W/m ² UNI EN 16798-1 - A.8.3 W/m ² UNI EN 16798-1 - A.8.3 | | | | | | | |
| GAINS and ENTILATIO | Type of ventilation | W _A W/m ² UNI EN 16798-1 - A.8.3 Natural: 100% | | | | | | | | |
| VEI G | Air exchange rate * | n | h ⁻¹ | 0.30 | 0.00 | 0.30 | 0.30 | 0.30 | | |
| | Heating system type | " | Unknown: 98%; Autonomous: 2% | | | | | | | |
| THERMAL SYSTEMS | Heating generator | Unknown: 98%; Autonomous: 2% Unknown: 54%; Traditional boiler: 35%; Fireplace: 7%; Condensing boiler: 3%; Electric heating: 1% | | | | | | | | |
| | Daily operating time of the heating system * | No limitations | | | | | | | | |
| | Energy carrier | Unknown: 54%; Natural gas: 14%; Gas Oil: 11%; LPG: 6%; Electricity and solid biomass: 5%; Electricity and natural gas: 4%; Electricity and gas oil: 3%; Solid biomass: 2%; Electricity: 1% | | | | | | | | |
| | Heating emission sub-system | Unknown: 52%; Radiators: 45%; Air Ducts: 2%; Air Heater: 1% | | | | | | | | |
| | Cooling system type | - | | | | | | | | |
| | Daily operating time of the cooling system * | t _C | h | - | - | - | - | - | | |
| | Cooling emission sub-system | - | | | | | | | | |
| | DHW system type | - | | | | | | | | |
| | DHW generator | Unknown: 55%; Electric boiler: 32%; Electric heat pump: 7%; Natural gas boiler: 5%; Condensing boiler: 1% | | | | | | | | |
| | | able in the considered sources, and are thus derived from UNI EN Standards | | | | | | | | |



Region: Liguria Archetype code: **Building category:** Residential buildings - Apartments in multi-family block RES APPBLOCK 1971-1980_F_LIG **Period of construction:** 1971-1980 Climatic zone: F **Number of records: Numerical variables – GEOMETRY** WINDOWS TO WALL RATIO **COMPACTNESS RATIO** 0.50 1.6 0.45 1.4 0.40 1.2 0.35 1.0 0.30 E 0.8 0.25 0.20 0.6 0.15 0.4 0.10 0.2 0.05 0.0 0.00 ■ WWR_N ■ WWR_S ■ WWR_E ■ WWR_W ■ Awi/Ause **Numerical variables – ENVELOPE OPAQUE BUILDING COMPONENTS U-VALUE WINDOWS U-VALUE** 3.00 7.00 6.00 2.50 5.00 2.00 W·m-2-K-1 4.00 1.50 3.00 1.00 2.00 0.50 1.00 0.00 0.00 ■ External walls ■ Slab on ground floor ■ Roof Numerical variables - GAINS, VENTILATION and SYSTEMS USAGE (Standard Values) **AIR EXCHANGE RATE OCCUPANCY DENSITY** 1.00 0.30 0.90 0.25 0.80 0.70 0.20 0.60 people. 0.50 0.15 0.40 0.10 0.30 0.20 0.05 0.10 0.00 0.00 **INTERNAL GAINS POWER DENSITY DAILY OPERATING TIME** 10 20 9 18 8 16 14 12 5 10 8 3 6 2 4 2 0 ■ Heating ■ Cooling The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its




 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Apartments in multi-family block
 RES_APPBLOCK_

 Period of construction:
 1971-1980
 1971-1980_F_LIG

 Climatic zone:
 F
 Number of records:
 110

| ADDITIONAL DATA | | | | | | | | | | | |
|-------------------------|---------------------------------|---|-----------------|---|--------------------|------------------------|-----------------|---------------------|--|--|--|
| | Data | Symbol | Unit of measure | Mean value | Standard deviation | Q1 (first quartile) | Median value | Q3 (third quartile) | | | |
| GEOMETRY: apartments | Inter-storey height | H _n | m | 3.0 | 0.2 | 2.9 | 3.0 | 3.1 | | | |
| | Heated gross floor area | A _{H;g} | m² | - | - | - | - | - | | | |
| | Heated net floor area | A _{H;n} | m² | 54.0 | 24.4 | 37.4 | 46.6 | 64.4 | | | |
| | Heated gross volume | V _{H;g} | m³ | 198.1 | 97.9 | 135.7 | 161.4 | 221.4 | | | |
| U m | Heated net volume | V _{H;n} | m³ | 146.5 | 67.2 | 103.6 | 124.5 | 164.9 | | | |
| THERMAL SYSTEMS | Heating efficiency or COP | η _{H;gen} or <i>COP</i> H;gen | - | This value has to be retrieved from suitable datasheets | | | | | | | |
| | Total heating power * | P _{H;gen} | kW | 19.6 | 8.5 | 11.7 | 24.0 | 24.2 | | | |
| | Cooling efficiency or EER | η _{C;gen} or EER _{C;gen} | - | This value has to be retrieved from suitable datasheets | | | | | | | |
| | Total cooling power * | P _{C;gen} | kW | - | - | - | - | - | | | |
| | Temperature of DHW | θ_{W} | °C | - | - | - | - | - | | | |
| É | DHW system power * | P _{W;gen} | kW | 7.9 | 11.1 | 1.2 | 1.2 | 16.3 | | | |
| | * These values refer to the apa | rtment scale | | | | | | | | | |

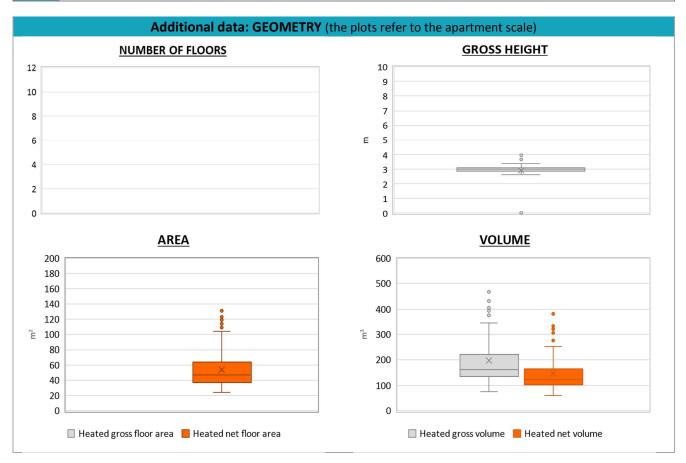





NOTE: Sample size of the analysed data.

Compactness ratio: 110; U-value of the roof: 18; U-value of the wall: 92; U-value of the windows: 110; Inter-storey height: 106; Heated net floor area: 106; Heated gross volume: 106; Heated net volume: 106; Total heating power: 31; DHW system power: 66; CO2 Emission: 102; EP_H_nren: 107; EP_W_nren: 109; EP_GL_nren: 108; EP_H_ren: 59; EP_W_ren: 87