

Description:

Region:LiguriaArchetype code:Building category:Residential buildings – Apartments in multi-family blockRES_APPBLOCK_19811981-19901981-1990_E_LIG

Climatic zone: E Number of records: 269

External walls: no data available

Data sources: EPC databases (100%)

Roof sla	<u>bs:</u> no data available									
	Data	Symbol	Unit of	Mean	Standard	Q1 (first	Q2 (Median	Q3 (third		
BUILDING GEOMETRY	Newshau of flague		measure	value	deviation	quartile)	value)	quartile)		
	Number of floors	n _f	-	-	-	-	-	-		
	Gross height	Hg	m	-	-	-	-	-		
	Footprint area	A _{footprint}	m²	-	-	-	-	-		
	Heated gross floor area	A _{H;g}	m ²	-	-	-	-	-		
	Heated net floor area	A _{H;n}	m ²	-	-	-	-	-		
	Heated gross volume	V _{H;g}	m³	-	-	-	-	-		
	Heated net volume	V _{H;n}	m³	-	-	-	-	-		
N N	Compactness ratio	A _{env} /V _{H;g}	m ⁻¹	0.63	0.26	0.40	0.66	0.77		
9	WWR – North orientation	WWR _N	-	-	-	-	-	-		
BU	WWR – South orientation	WWR _S	-	-	-	-	-	-		
	WWR – East orientation	WWR _E	-	-	-	-	-	-		
	WWR – West orientation	WWR _w	-	-	-	-	-	-		
	Window to useful floor area ratio	A _{wi} /A _{use}	-	0.13	0.06	0.09	0.10	0.14		
	Roof type				-					
	<i>U</i> -value of the roof	U _{fl;up}	W/(m²⋅K)	1.19	0.69	0.54	1.32	1.81		
	External walls type				-					
PE	<i>U</i> -value of the wall	U _{wl}	W/(m²⋅K)	1.15	0.45	0.90	1.18	1.32		
Ē	Slab on ground floor type	-								
ENVELOPE	<i>U</i> -value of the floor	U _{fl;lw}	W/(m²⋅K)	1.38	0.48	1.05	1.42	1.69		
	Windows type	-								
	<i>U</i> -value of the windows	Uw	W/(m²⋅K)	4.18	1.13	3.24	4.35	5.06		
	Shading system type				-					
z	Occupancy density *	O _C	person/m²		UN	II EN 16798-1	- Table A.19			
	Lighting power density *	W _L	W/m²	UNI EN 16798-1 - A.8.3						
NS I	Equipment power density *	W _A	W/m²			UNI EN 16798	3-1 - A.8.3			
GAINS and VENTILATION	Type of ventilation			Natural: 100%						
A H	Air exchange rate *	n	h-1	0.30	0.00	0.30	0.30	0.30		
	Heating system type	Unknown: 92%; Autonomous: 7%; Centralized: 1%								
	Heating generator	Traditional boiler: 46%; Unknown: 45%; Condensing boiler: 7%; Fireplace: 1%; Air-source heat pump: 1%								
THERMAL SYSTEMS	Daily operating time of the heating system *	t _H	h	14	0	14	14	14		
	Energy carrier	Unknown: 44%; Natural gas: 32%; Electricity and natural gas: 17%; LPG: 3%; Electricity and solid biomass: 1%; Gas Oil: 1%; Electricity: 1%; Electricity and gas oil 1%								
	Heating emission sub-system	Radiators: 54%; Unknown: 43%; Air Ducts: 1%; Radiant panels: 1%; Fan-coil: 1%								
	Cooling system type	Unknown: 99%; Heat pump air-air: 1%								
	Daily operating time of the cooling system *	t _C	h	-	-	-	-	-		
	Cooling emission sub-system				-					
	DHW system type	-								
	DHW generator	Unknown: 80%; Condensing boiler: 9%; Electric boiler: 8%; Electric heat pump: 2%; Natural gas boiler: 1%								
	* These values were not availab	ble in the considered sources, and are thus derived from UNI EN Standards								



Region: Liguria Archetype code: **Building category:** Residential buildings - Apartments in multi-family block RES APPBLOCK 1981-1990_E_LIG 1981-1990 **Climatic zone:** Ε **Number of records: Numerical variables – GEOMETRY WINDOWS TO WALL RATIO COMPACTNESS RATIO** 1.6 0.50 0.45 1.4 0.40 1.2 0.35 1.0 0.30 m-1 0.8 0.25 0.6 0.20 0.15 0.4 0.10 0.2 0.05 0.0 0.00 ■ WWR_N ■ WWR_S ■ WWR_E ■ WWR_W ■ Awi/Ause **Numerical variables – ENVELOPE OPAQUE BUILDING COMPONENTS UVALUE WINDOWS U-VALUE** 3.00 7.00 6.00 2.50 5.00 2.00 4.00 W·m⁻²·K⁻¹ 1.50 3.00 1.00 2.00 1.00 0.50 0.00 0.00 □ External walls ■ Slab on ground floor ■ Roof Numerical variables - GAINS, VENTILATION and SYSTEMS USAGE (Standard Values) AIR EXCHANGE RATE **OCCUPANCY DENSITY** 1.00 0.30 0.90 0.25 0.80 0.70 0.20 people·m⁻² 0.60 0.50 0.15 0.40 0.10 0.30 0.20 0.05 0.10 0.00 0.00 **INTERNAL GAINS POWER DENSITY DAILY OPERATING TIME** 10 20 9 18 8 16 14 12 5 10 8 3 6 4 2 2 0 Heating Cooling The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its




 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Apartments in multi-family block
 RES_APPBLOCK_

 1981
 1981-1990
 1981-1990_E_LIG

 Climatic zone:
 E
 Number of records:
 269

ADDITIONAL DATA											
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)			
GEOMETRY: apartments	Inter-storey height	H _n	m	3.1	0.2	3.0	3.1	3.2			
	Heated gross floor area	A _{H;g}	m²								
	Heated net floor area	A _{H;n}	m²	78.4	28.2	60.4	75.3	90.1			
	Heated gross volume	V _{H;g}	m³	298.6	111.0	222.5	284.5	340.7			
	Heated net volume	$V_{H;n}$	m³	219.9	78.6	167.4	213.2	254.3			
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or <i>COP</i> H;gen	-	This value has to be retrieved from suitable datasheets							
	Total heating power *	P _{H;gen}	kW	24.8	6.1	24.0	24.0	26.0			
	Cooling efficiency or EER	η _{C;gen} or EER _{C;gen}	-	This value has to be retrieved from suitable datasheets							
	Total cooling power *	P _{C;gen}	kW	-	-	-	-	-			
	Temperature of DHW	θ_{W}	°C	-	-	-	-	-			
⊢ ⊨	DHW system power *	$P_{\mathrm{W;gen}}$	kW	21.3	8.5	22.8	24.0	24.3			

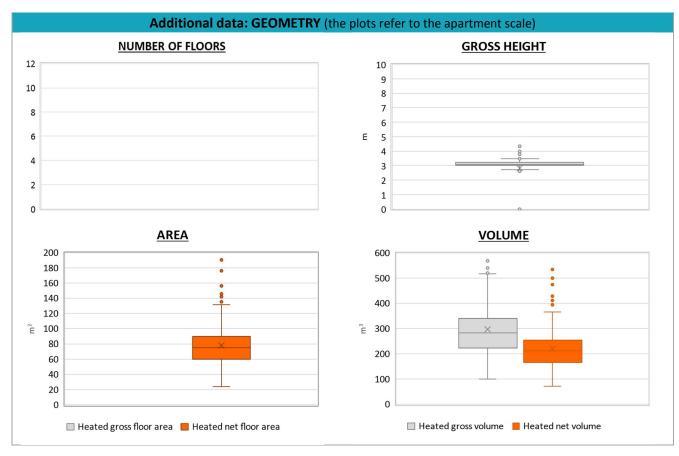





NOTE: Sample size of the analysed data.

Compactness ratio: 242; Window to useful floor area ratio: 22; U-value of the roof: 46; U-value of the wall: 230; U-value of the floor: 23; U-value of the windows: 269; Inter-storey height: 242; Heated net floor area: 242; Heated gross volume: 242; Heated net volume: 242; Total heating power: 111; DHW system power: 201; CO2 Emission: 264; EP_H_nren: 264; EP_W_nren: 247; EP_GL_nren: 269; EP_H_ren: 187; EP_W_ren: 134