


Region:	Trentino						Archetype code: RES_TEMP_ 1941-1950_F_TN	
Building category:	Temporary residential buildings							
Period of construction:	1941-1950							
Climatic zone:	F	Number of records:				40		
Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): External walls: no data available Roof slabs: no data available							Data sources: EPC databases (100%)	
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
BUILDING GEOMETRY	Number of floors	n_f	-	-	-	-	-	-
	Gross height	H_g	m	-	-	-	-	-
	Footprint area	$A_{\text{footprint}}$	m ²	-	-	-	-	-
	Heated gross floor area	$A_{H,g}$	m ²	-	-	-	-	-
	Heated net floor area	$A_{H,n}$	m ²	1002	792	509	756	1247
	Heated gross volume	$V_{H,g}$	m ³	-	-	-	-	-
	Heated net volume	$V_{H,n}$	m ³	3749	2844	1960	3186	4776
	Compactness ratio	$A_{\text{env}}/V_{H,g}$	m ⁻¹	0.51	0.16	0.39	0.47	0.60
	WWR – North orientation	WWR_N	-	-	-	-	-	-
	WWR – South orientation	WWR_S	-	-	-	-	-	-
	WWR – East orientation	WWR_E	-	-	-	-	-	-
	WWR – West orientation	WWR_W	-	-	-	-	-	-
	Window to useful floor area ratio	A_{wi}/A_{use}	-	-	-	-	-	-
	ENVELOPE	Roof type	-					
U-value of the roof		$U_{\text{fl;up}}$	W/(m ² ·K)	-	-	-	-	-
External walls type		-						
U-value of the wall		U_{wl}	W/(m ² ·K)	-	-	-	-	-
Slab on ground floor type		-						
U-value of the floor		$U_{\text{fl;lw}}$	W/(m ² ·K)	-	-	-	-	-
Windows type		-						
U-value of the windows		U_W	W/(m ² ·K)	-	-	-	-	-
Shading system type		-						
GAINS and VENTILATION	Occupancy density *	O_C	person/m ²	UNI EN 16798-1				
	Lighting power density *	W_L	W/m ²	UNI EN 16798-1				
	Equipment power density *	W_A	W/m ²	UNI EN 16798-1				
	Type of ventilation	Natural: 100%						
	Air exchange rate *	n	h ⁻¹	0.3	-	0.3	0.3	0.3
THERMAL SYSTEMS	Heating system type	Unknown: 60%; Centralized: 33%; Autonomous: 7%						
	Heating generator	Boiler (unknown type): 78%; Unknown: 20%; Heat exchanger of district heating/cooling: 2%						
	Daily operating time of the heating system *	t_H	h	No limitation				
	Energy carrier	Gas oil: 45%; Natural gas: 34%; Solid biomass: 9%; LPG: 6%; District heating: 3%; Electricity from PV, wind turbines, hydraulic turbines: 3%						
	Heating emission sub-system	-						
	Cooling system type	Unknown: 100%						
	Daily operating time of the cooling system *	t_C	h	No limitation				
	Cooling emission sub-system	-						
	DHW system type	Unknown: 44%; Centralized – coupled with heating: 25%; Autonomous – coupled with heating: 18%; District heating: 8%; Autonomous - detached from heating: 5%						
	DHW generator	Natural gas boiler: 68%; Unknown: 21%; Electric Heat Pump: 6%; Electric boiler: 5%						
	* These values were not available in the considered sources, and are thus derived from UNI EN Standards							


Region:	Trentino	Archetype code: RES_TEMP_ 1941-1950_F_TN
Building category:	Temporary residential buildings	
Period of construction:	1941-1950	
Climatic zone:	F	
Number of records:		40

Numerical variables – GEOMETRY

COMPACTNESS RATIO

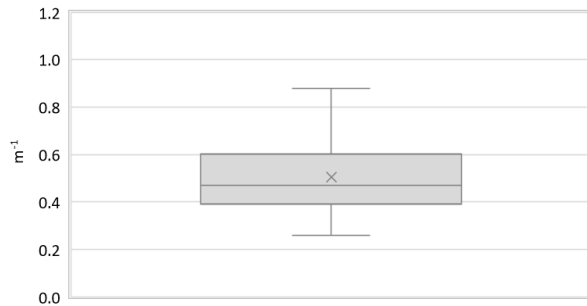


WINDOWS TO WALL RATIO

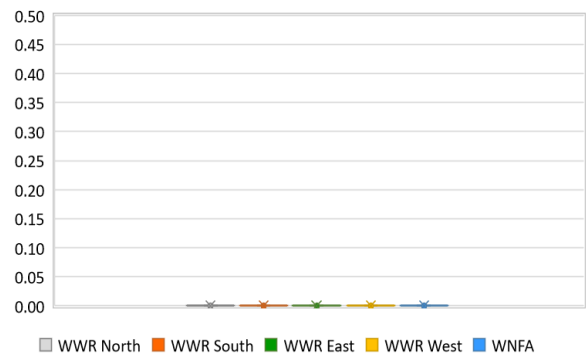


Numerical variables – ENVELOPE

OPAQUE BUILDING COMPONENTS U-VALUE

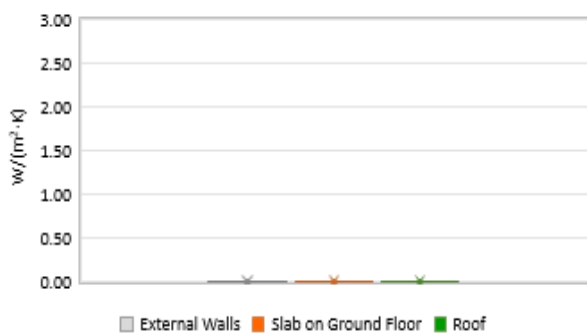

WINDOWS U-VALUE

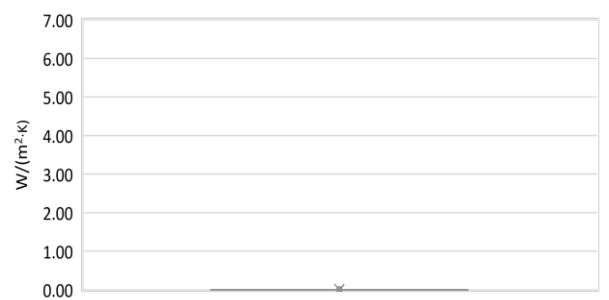

Numerical variables – GAINS, VENTILATION and SYSTEMS USAGE

AIR EXCHANGE RATE




OCCUPANCY DENSITY



INTERNAL GAINS POWER DENSITY




DAILY OPERATING TIME

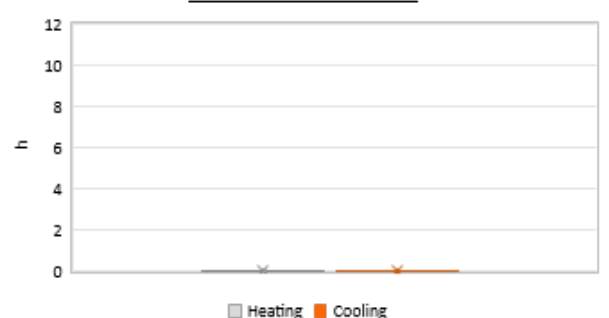

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.

Region:	Trentino			Archetype code: RES_TEMP_ 1941-1950_F_TN
Building category:	Temporary residential buildings			
Period of construction:	1941-1950			
Climatic zone:	F	Number of records:	40	

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
THERMAL SYSTEMS	Heating efficiency or <i>COP</i>	$\eta_{H,gen}$ or $COP_{H,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total heating power *	$P_{H,gen}$	kW	134	81	70	128	188
	Cooling efficiency or <i>EER</i>	$\eta_{C,gen}$ or $EER_{C,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total cooling power *	$P_{C,gen}$	kW	-	-	-	-	-
	Temperature of DHW	ϑ_W	°C	40	-	40	40	40
	DHW system power *	$P_{W,gen}$	kW	117	79	50	105	186

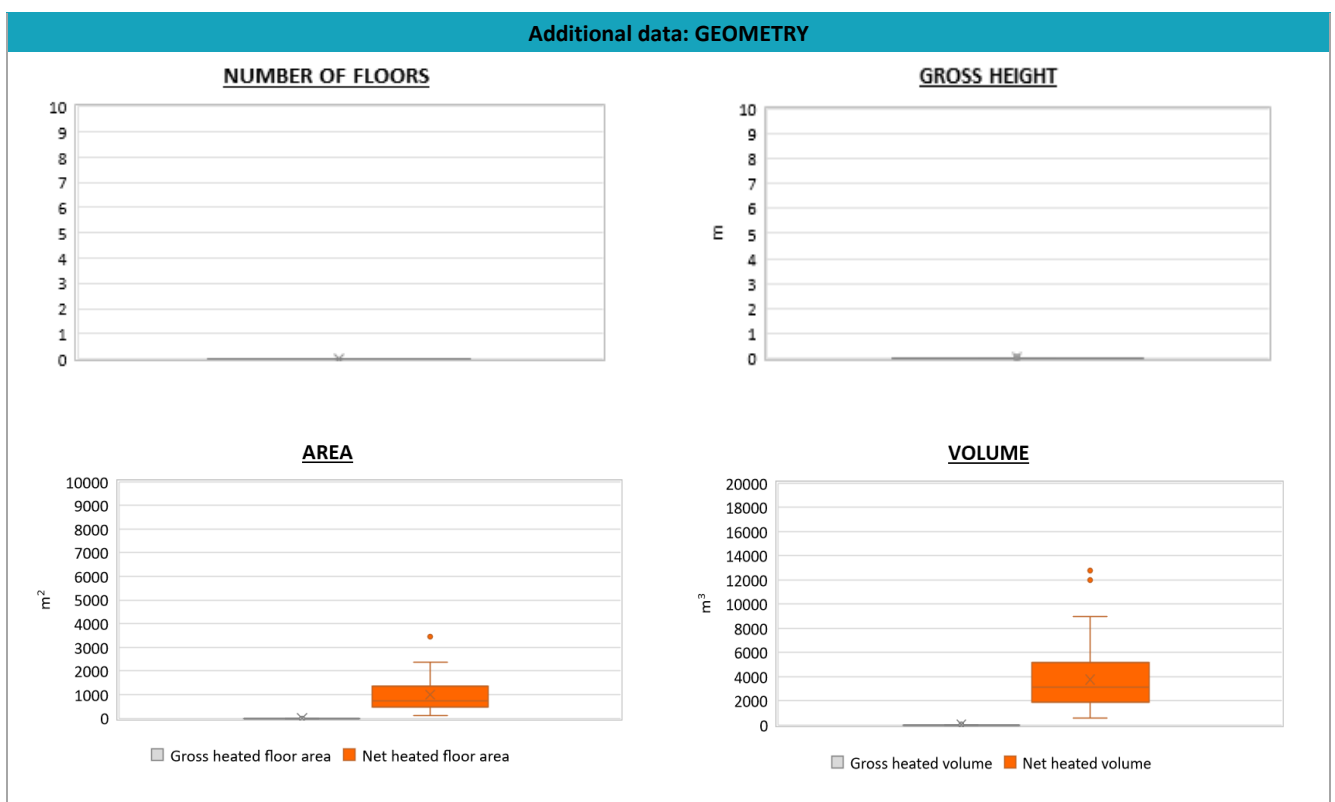


Region:	Trentino	Archetype code: RES_TEMP_ 1941-1950_F_TN
Building category:	Temporary residential buildings	
Period of construction:	1941-1950	
Climatic zone:	F	
Number of records:		40

Additional data: other numerical variables that are not included in the archetype


DHW SUPPLY TEMPERATURE




SYSTEM POWER

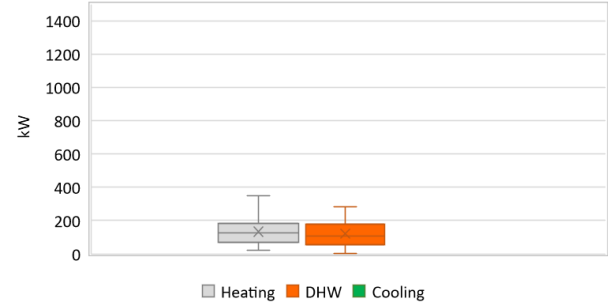


CO₂ EMISSION

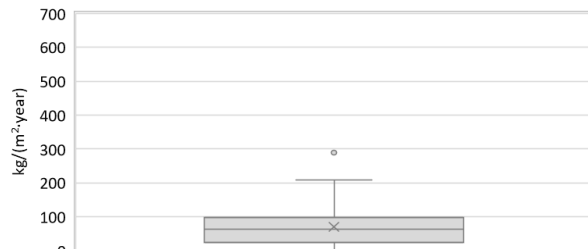

HEATING SYSTEM INSTALLATION YEAR

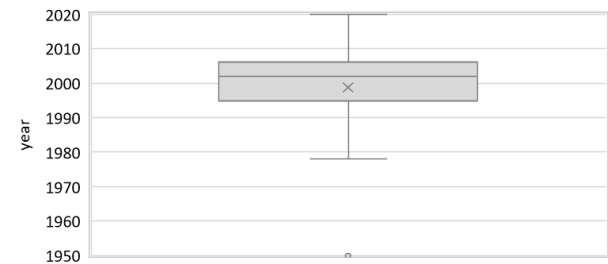

NON-RENEWABLE PRIMARY ENERGY USE

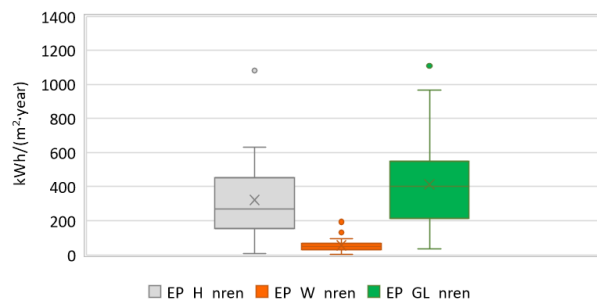

RENEWABLE PRIMARY ENERGY USE

