

Region:		Trentino		Archetype code:						
Building category:		Temporary	residential l	RES_TEMP_						
		1951-1960							60_F_TN	
Climatic zone: F		Number of records: 70								
<b>Description</b> (the codes associated with wa		alls and slabs	refer to the stru	ctures describe	ed in UNI/TR 1	1552:2014):	Data s	ources:		
External	walls: no data av	vailable						EPC databa	ases (100%)	
Roof sla	<u>bs</u> : no data availa	able								
	Data		Symbol	Unit of	Mean	Standard	Q1 (first	Median	Q3 (third	
				measure	value	deviation	quartile)	value	quartile)	
	Number of floors		nf	-	-	-	-	-	-	
	Gross height		Hg	m	-	-	-	-	-	
	Footprint area		A <sub>footprint</sub>	m <sup>2</sup>	-	-	-	-	-	
≿	Heated gross floor area		A <sub>H;g</sub>	m <sup>2</sup>	-	-	-	-	-	
ETF	Heated net floor area		A <sub>H;n</sub>	m <sup>2</sup>	1215	1049	465	894	1406	
BUILDING GEOMETRY	Heated gross volume		V <sub>H;g</sub>	m <sup>3</sup>	-	-	-	-	-	
	Heated net volume		V <sub>H;n</sub>	m <sup>3</sup>	4591	4363	1792	3208	5361	
	Compactness ratio		A <sub>env</sub> /V <sub>H;g</sub>	m <sup>-1</sup>	0.54	0.16	0.44	0.52	0.61	
	WWR – North orientation		WWR <sub>N</sub>	-	-	-	-	-	-	
	WWR – South orientation		WWRs	-	-	-	-	-	-	
	WWR – East orientation		WWR <sub>E</sub> WWR <sub>W</sub>	-	-	-	-	-	-	
		<i>WWR</i> – West orientation Window to useful floor		-	-	-	-	-	-	
	area ratio		A <sub>wi</sub> /A <sub>use</sub>	-	-	-	-	-	-	
	Roof type					-				
	<i>U</i> -value of the roof		U <sub>fl;up</sub>	W/(m²·K)	-	-	-	_	_	
	External walls t		- 11/40		<u> </u>	-			I	
H	U-value of the v	wall	U <sub>wl</sub>	W/(m²·K)	-	-	-	-	-	
ELC	Slab on ground	floor type				-				
ENVELOPE	U-value of the floor		U <sub>fl;lw</sub>	W/(m²·K)	-	-	-	-	-	
	Windows type			-		-			-	
	U-value of the windows		Uw	W/(m²⋅K)	-	-	-	-	-	
	Shading system type					-				
_	Occupancy density *		Oc	Oc person/m² UNI EN 16798-1						
NOI.	Lighting power density *		WL	W/m <sup>2</sup>	UNI EN 16798-1					
GAINS and VENTILATIOI	Equipment pow	Equipment power density		<i>W</i> <sub>A</sub> W/m <sup>2</sup> UNI EN 16798-1						
5AII ENT										
° B	Type of ventilation Air exchange rate *		n	h-1	0.3	Natural: 10	0.3	0.3	0.3	
	Heating system					Centralized: 31	 L%; Autonomou	s <sup>.</sup> 17%		
			Boiler (un					nger of district h	eating/cooling:	
	Heating genera		· ·			1%	· · ·			
		Daily operating time of the		h			No limitatio	n		
	heating system *									
MS	Energy carrier		Gas oil: 51%; Natural gas: 23%; Solid biomass: 15%; LPG: 6%; Electricity: 3%; District hea							
STE	Heating emission sub- system		-							
THERMAL SYSTEMS	Cooling system type		Unknown: 99%; Air-cooled chiller: 1%							
	Daily operating time of the									
	cooling system *		t <sub>C</sub> h No limitation							
Ē	Cooling emission sub-		_							
	system		Unknown: 38%; Autonomous – coupled with heating: 30%; Centralized – coupled with heating: 2						hasting: 27%	
	DHW system ty	pe	Autonomous - detached from heating: 4%; District heating: 1%						neating. 27%;	
	DHW generator									
	* These values were not available in the considered sources, and are thus derived from UNI EN Standards									

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Temporary residential buildings – 1951/1960 – Zone F – Trentino






C) (1)

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Temporary residential buildings – 1951/1960 – Zone F – Trentino



Region:	Archetype code:		
Building category:	RES_TEMP_		
Period of construction:	1951-1960_F_TN		
Climatic zone:	F	Number of records: 70	


ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
THERMAL SYSTEMS	Heating efficiency or COP	η <sub>H;gen</sub> or COP <sub>H;gen</sub>	-	This value has to be retrieved from suitable datasheets				
	Total heating power *	P <sub>H;gen</sub>	kW	186	211	80	122	210
	Cooling efficiency or EER	η <sub>C;gen</sub> or EER <sub>C;gen</sub>	- This value has to be retrieved from suitable datasheets					asheets
	Total cooling power *	P <sub>C;gen</sub>	kW	217	250	75	111	307
	Temperature of DHW	ϑ <sub>w</sub>	°C	-	-	-	-	-
	DHW system power *	P <sub>W;gen</sub>	kW	176	214	68	118	208

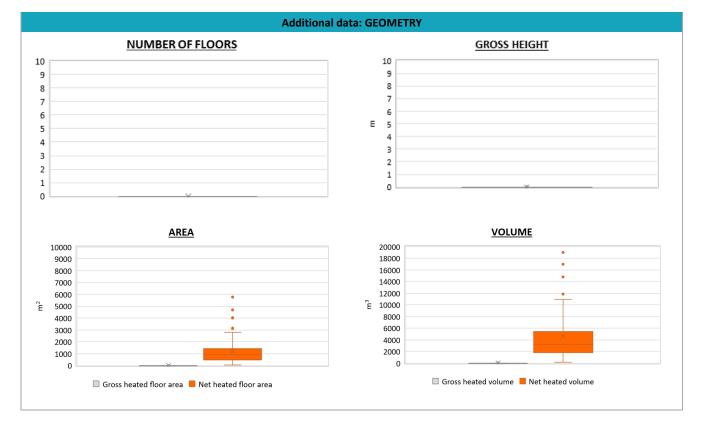



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Temporary residential buildings – 1951/1960 – Zone F – Trentino



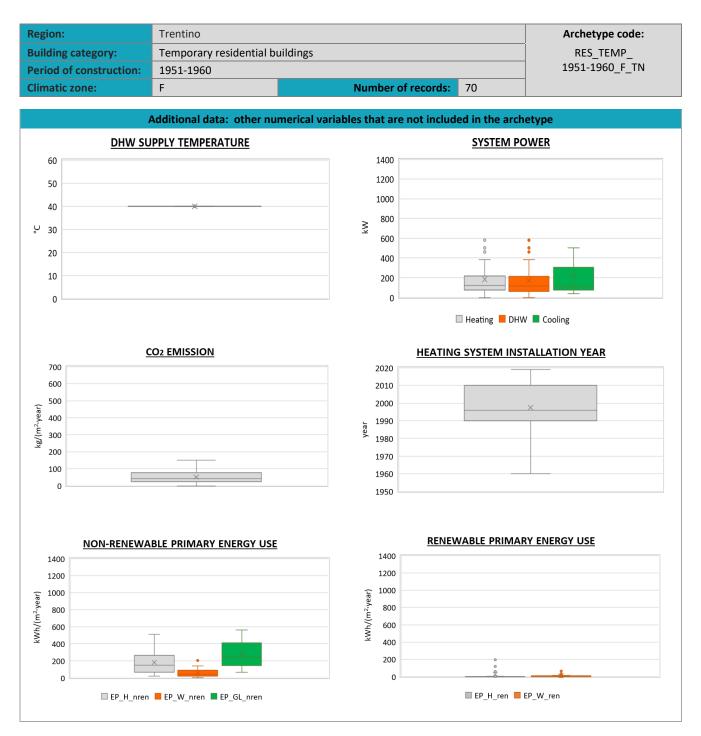



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Temporary residential buildings – 1951/1960 – Zone F – Trentino