

 Region:
 Aosta Valley
 Archetype code:

 Building category:
 Residential buildings - Apartments (in multifamily blocks)
 RES\_APPBLOCK\_1946-1946-1961

 Period of construction:
 1946 - 1961
 1961\_E-F\_VAL

 Climatic zone:
 E-F
 Number of records:
 1933

**Description** (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): <a href="mailto:External walls">External walls</a>: solid brick masonry (cod. MLP01) or hollow brick masonry with air gap (cod. MCV01). <a href="mailto:Roof slabs">Roof slabs</a>: concrete floor slab (cod. SOL06).

Data sources: EPC databases (100%)

	I <b>.</b> .					04 (5)	II	00/11: 1		
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)		
BUILDING GEOMETRY	Number of floors	n <sub>f</sub>	-	-	-	-	-	-		
	Gross height	Hg	m	-	-	-	-	-		
	Footprint area	$A_{\text{footprint}}$	m <sup>2</sup>	-	-	-	-	-		
	Heated gross floor area	A <sub>H;g</sub>	m <sup>2</sup>	-	-	-	-	-		
	Heated net floor area	A <sub>H;n</sub>	m <sup>2</sup>	-	-	-	-	-		
	Heated gross volume	V <sub>H;g</sub>	m³	-	-	-	-	-		
	Heated net volume	V <sub>H;n</sub>	m³	-	-	-	-	-		
	Compactness ratio	A <sub>env</sub> /V <sub>H;g</sub>	m <sup>-1</sup>	0.66	0.24	0.47	0.67	0.81		
٥	WWR – North orientation	WWR <sub>N</sub>	-	0.12	0.04	0.09	0.11	0.14		
팅	WWR – South orientation	WWR <sub>s</sub>	-	0.12	0.04	0.09	0.11	0.14		
	WWR – East orientation	WWR <sub>E</sub>	-	0.12	0.04	0.09	0.11	0.14		
	WWR – West orientation	WWR <sub>W</sub>	-	0.12	0.04	0.09	0.11	0.14		
	Window to useful floor area ratio	A <sub>wi</sub> /A <sub>use</sub>	-	0.17	0.09	0.13	0.17	0.20		
ENVELOPE	Roof type				-					
	<i>U</i> -value of the roof **	U <sub>fl;up</sub>	W/(m <sup>2</sup> ·K)	1.25	0.47	1.04	1.32	1.47		
	External walls type	Solid Brick masonry: 45%; Hollow brick masonry: 30%; Masonry with local stones: 21%; Unknown: 2%; Concrete wall: 2%								
	<i>U</i> -value of the wall	$U_{wl}$	W/(m <sup>2</sup> ·K)	1.15	0.64	0.62	1.11	1.59		
	Slab on ground floor type				-					
	<i>U</i> -value of the floor **	$U_{fl;lw}$	W/(m²·K)	1.03	0.32	0.96	1.11	1.18		
	Windows type	Double glazing, wooden frame: 66%; Single glazing, wooden frame: 17%; Double glazing, PVC frame: 13%; Triple glazing, wooden frame: 3%; Triple glazing, PVC frame: 1%								
	<i>U</i> -value of the windows	$U_{W}$	W/(m²·K)	2.69	1.04	1.95	2.67	3.07		
	Shading system type	•								
_ Z	Occupancy density *	O <sub>C</sub>	person/m <sup>2</sup>	UNI EN 16798-1 - Table A.19						
GAINS and ENTILATION	Lighting power density *	$W_{L}$	W/m²	UNI EN 16798-1 - A.8.3						
S 5	Equipment power density *	W <sub>A</sub>	W/m <sup>2</sup>	UNI EN 16798-1 - A.8.3						
GAINS and VENTILATION	Type of ventilation			Natural: 100%						
>	Air exchange rate *	n	h <sup>-1</sup>	0.30	0.00	0.30	0.30	0.30		
	Heating system type	Autonomous: 68%; Centralized: 32%								
THERMAL SYSTEMS	Heating generator	Boiler (unknown type): 40%; Traditional Boiler: 32%; Condensing Boiler: 12%; Fireplace: 11%; Unknown: 4%; Heat exchanger of district heating/cooling: 1%								
	Daily operating time of the heating system *	t <sub>H</sub>	h			-				
	Energy carrier	Gas Oil: 38%; Natural Gas: 26%; LPG: 20%; Solid biomass: 14%; District heating: 2%								
	Heating emission sub-system	-								
	Cooling system type				Absent:	100%				
	Daily operating time of the cooling system *	t <sub>C</sub>	h	-	-	-	-	-		
	Cooling emission sub-system				-					
	DHW system type	Autonomous, coupled with heating: 45%; Autonomous, detached from heating: 38%; Centralized, coupled with heating: 16%; Centralized, detached from heating: 1%								
	DHW generator	Unknown: 52%; Natural gas boiler: 32%; Electric boiler: 15%; Electric Heat Pump: 1%								
	* These values are derived from UNI EN ISO Standards; ** U-values of the upper and lower slabs face unconditioned spaces (i.e., attic, basement, etc.)									



Region: Aosta Valley Archetype code: **Building category:** Residential buildings - Apartments (in multifamily blocks) RES APPBLOCK 1946-1961\_E-F\_VAL **Period of construction:** 1946 - 1961 Climatic zone: **Number of records:** 1933



(c) (i) (ii)

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.




 Region:
 Aosta Valley
 Archetype code:

 Building category:
 Residential buildings - Apartments (in multifamily blocks)
 RES\_APPBLOCK\_1946-1961

 Period of construction:
 1946 - 1961
 1961\_E-F\_VAL

 Climatic zone:
 E-F
 Number of records:
 1933

ADDITIONAL DATA											
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)			
GEOMETRY: apartments	Inter-storey height	H <sub>n</sub>	m	2.6	0.3	2.4	2.5	2.7			
	Heated gross floor area	A <sub>H;g</sub>	m <sup>2</sup>	-	-	-	-	-			
	Heated net floor area	A <sub>H;n</sub>	m <sup>2</sup>	87.3	272.8	45.6	58.9	77.8			
	Heated gross volume	V <sub>H;g</sub>	m³	348.8	1206.4	172.2	223.1	294.1			
	Heated net volume	V <sub>H;n</sub>	m³	318.5	1219.5	120.2	156.7	201.0			
THERMAL SYSTEMS	Heating efficiency or COP	η <sub>H;gen</sub> or COP <sub>H;gen</sub>	-	This value has to be retrieved from suitable datasheets							
	Total heating power *	P <sub>H;gen</sub>	kW	21.9	8.6	15.1	24.0	28.0			
	Cooling efficiency or EER	η <sub>C;gen</sub> or <i>EER</i> <sub>C;gen</sub>	-	This value has to be retrieved from suitable datasheets							
	Total cooling power *	P <sub>C;gen</sub>	kW	8.6	6.7	3.0	8.0	12.2			
	Temperature of DHW	ϑw	°C	40.0	0.0	40.0	40.0	40.0			
Ė	DHW system power *	P <sub>W;gen</sub>	kW	15.2	12.4	1.2	22.0	25.1			
	* These values refer to the apartment s										

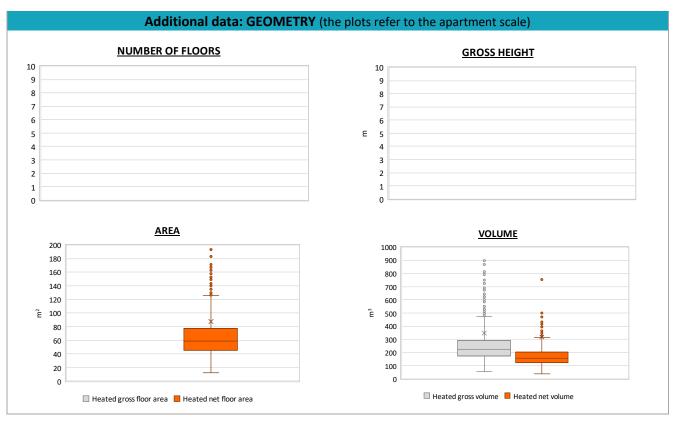



 Region:
 Aosta Valley
 Archetype code:

 Building category:
 Residential buildings - Apartments (in multifamily blocks)
 RES\_APPBLOCK\_1946-1961

 Period of construction:
 1946 - 1961
 1961\_E-F\_VAL

 Climatic zone:
 E-F
 Number of records:
 1933

