

 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Entire multifamily blocks
 RES\_ BLDGS\_

 Period of construction:
 1981-1990
 1981-1990\_C\_LIG

 Climatic zone:
 C
 Number of records:
 130

Description: Data sources:

External walls: no data available Roof slabs: no data available

EPC databases (100%)

	Data	Symbol									
		<b>0</b> , <b>0</b> .	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Q2 (Median value)	Q3 (third quartile)			
	Number of floors	n <sub>f</sub>	-	-	-	-	-	-			
	Gross height	Hg	m	-	-	-	-	-			
	Footprint area	A <sub>footprint</sub>	m²	-	-	-	-	-			
	Heated gross floor area	A <sub>H;g</sub>	m²	-	-	-	-	-			
T.	Heated net floor area	A <sub>H;n</sub>	m²	265.5	385.1	56.7	112.1	343.5			
Ā	Heated gross volume	V <sub>H;g</sub>	m³	999.1	1266.4	232.3	409.3	1433.4			
3EO	Heated net volume	V <sub>H;n</sub>	m³	740.5	987.2	171.7	284.3	1009.4			
BUILDING GEOMETRY	Compactness ratio	A <sub>env</sub> /V <sub>H;g</sub>	m <sup>-1</sup>	0.73	0.29	0.48	0.70	0.93			
٥	WWR – North orientation	WWR <sub>N</sub>	-	-	-	-	-	-			
5	WWR – South orientation	WWR <sub>s</sub>	-	-	-	-	-	-			
	WWR – East orientation	WWR <sub>E</sub>	-	-	-	-	-	-			
	WWR – West orientation	WWR <sub>w</sub>	-	-	-	-	-	-			
Ī	Window to useful floor area ratio	A <sub>wi</sub> /A <sub>use</sub>	-	0.13	0.07	0.09	0.12	0.13			
	Roof type				-						
	<i>U</i> -value of the roof	U <sub>fl;up</sub>	W/(m²⋅K)	1.14	0.86	0.34	1.15	1.69			
	External walls type	7-1			-						
E E	<i>U</i> -value of the wall	$U_{ m wl}$	W/(m²⋅K)	1.13	0.55	0.75	1.22	1.35			
EFC	Slab on ground floor type	-									
ENVELOPE	<i>U</i> -value of the floor	U <sub>fl;lw</sub>	W/(m²⋅K)	1.44	0.71	1.04	1.31	1.76			
	Windows type	,			-						
	<i>U</i> -value of the windows	Uw	W/(m <sup>2</sup> ·K)	3.80	1.24	2.94	3.70	4.61			
	Shading system type				-						
z	Occupancy density *	O <sub>C</sub> person/m <sup>2</sup> UNI EN 16798-1 - Table A.19									
GAINS and VENTILATION	Lighting power density *	W <sub>L</sub>	W/m²	UNI EN 16798-1 - A.8.3							
NS 8	Equipment power density *	W <sub>A</sub>	W/m²	•							
INT I	Type of ventilation		Natural: 81%; Mechanical: 19%								
~ <del>-</del> =	Air exchange rate *	n	h <sup>-1</sup>	0.30	0.00	0.30	0.30	0.30			
	Heating system type	Unknown: 95%; Autonomous: 4%; Centralized: 1%									
	Heating generator	Unknown: 37%; Traditional boiler: 29%; Condensing boiler: 27%; Air-source heat pump: 5%; Fireplace: 2%									
	Daily operating time of the heating system *	t <sub>H</sub>	h	10	0	10	10	10			
THERMAL SYSTEMS	Energy carrier	Unknown: 39%; Natural gas: 28%; LPG: 14%; Electricity and natural gas: 9%; Electricity: 5%; Gas Oil: 2%; Solid biomass: 2%; Electricity and solid biomass: 1%									
SYS	Heating emission sub-system	Radiators: 58%; Unknown: 37%; Air Ducts: 2%; Fan-coil: 2%; Air Heater: 1%									
IAL	Cooling system type	Unknown: 74%; Heat pump air-air: 25%; Heat pump air-water: 1%									
HERN	Daily operating time of the cooling system *	t <sub>C</sub>	h	-	-	-	-	-			
	Cooling emission sub-system										
	DHW system type	-									
	DHW generator	Unknown: 81%; Condensing boiler: 11%; Electric boiler: 5%; Electric heat pump: 1%; Solar thermal: 1%; Natural gas boiler: 1%									
	* These values were not available in the considered sources, and are thus derived from UNI EN Standards										



Region: Liguria Archetype code: RES\_ BLDGS\_ **Building category:** Residential buildings - Entire multifamily blocks 1981-1990\_C\_LIG 1981-1990 **Period of construction:** Climatic zone: С **Number of records: Numerical variables – GEOMETRY COMPACTNESS RATIO** WINDOWS TO WALL RATIO 1.6 0.50 1.4 0.45 0.40 1.2 0.35 0.30 m-1 0.8 0.25 0.6 0.20 0.15 0.4 0.10 0.2 0.05 0.0 0.00 ■ WWR\_N ■ WWR\_S ■ WWR\_E ■ WWR\_W ■ Awi/Ause **Numerical variables – ENVELOPE OPAQUE BUILDING COMPONENTS UVALUE WINDOWS U-VALUE** 3.00 7.00 6.00 2.50 5.00 2.00 4.00 W·m<sup>-2</sup>·K<sup>-1</sup> 1.50 3.00 1.00 2.00 1.00 0.50 0.00 0.00 ■ External walls ■ Slab on ground floor ■ Roof Numerical variables - GAINS, VENTILATION and SYSTEMS USAGE (Standard Values) AIR EXCHANGE RATE **OCCUPANCY DENSITY** 1.00 0.30 0.90 0.25 0.80 0.70 0.20 people·m<sup>-2</sup> 0.60 0.50 0.15 0.40 0.10 0.30 0.20 0.05 0.10 0.00 0.00 **INTERNAL GAINS POWER DENSITY DAILY OPERATING TIME** 10 20 9 18 8 16 14 12 5 10 3 6 2 4 2 The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its




 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Entire multifamily blocks
 RES\_ BLDGS\_

 Period of construction:
 1981-1990
 1981-1990\_C\_LIG

 Climatic zone:
 C
 Number of records:
 130

ADDITIONAL DATA											
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)			
GEOMETRY: apartments	Inter-storey height	$H_{n}$	m	3.1	0.3	3.0	3.1	3.3			
	Heated gross floor area	$A_{H;g}$	m²	-	-	-	-	-			
	Heated net floor area	$A_{H;n}$	m²	-	-	-	-	-			
	Heated gross volume	$V_{H;g}$	m³	-	-	-	-	-			
	Heated net volume	V <sub>H;n</sub>	m³	-	-	-	-	-			
THERMAL SYSTEMS	Heating efficiency or COP	$\eta_{ extsf{H};  extsf{gen}}$ or $ extsf{COP}_{ extsf{H};  extsf{gen}}$	-	This value has to be retrieved from suitable datasheets							
	Total heating power *	P <sub>H;gen</sub>	kW	26.7	14.5	23.5	24.0	27.7			
	Cooling efficiency or EER	$\eta_{C;gen}$ or $\mathit{EER}_{C;gen}$	-	This value has to be retrieved from suitable datasheets							
	Total cooling power *	$P_{C;gen}$	kW	-	-	-	-	-			
	Temperature of DHW	$ heta_{\sf W}$	°C	-	-	-	-	-			
	DHW system power *	$P_{ m W;gen}$	kW	21.9	9.7	23.4	24.0	24.5			
	* These values refer to the apa										

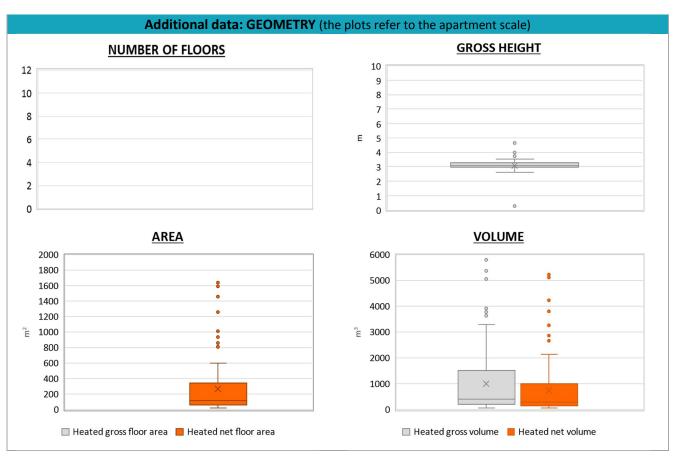





NOTE: Sample size of the analysed data.

Compactness ratio: 129; Window to useful floor area ratio: 16; U-value of the roof: 52; U-value of the wall: 104; U-value of the floor: 13; U-value of the windows: 130; Inter-storey height: 130; Heated net floor area: 130; Heated gross volume: 128; Heated net volume: 128; Total heating power: 50; DHW system power: 72; CO2 Emission: 127; EP\_H\_nren: 128; EP\_W\_nren: 118; EP\_GL\_nren: 129; EP\_H\_ren: 110; EP\_W\_ren: 69