

 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Entire multifamily blocks
 RES\_BLDGS\_

 Period of construction:
 2001 2001-\_E\_LIG

 Climatic zone:
 E
 Number of records:
 75

Description: Data sources:

External walls: no data available Roof slabs: no data available

EPC databases (100%)

|                   | Data   | Symbol   | Unit of measure       | Mean<br>value                                | Standard deviation | Q1 (first<br>quartile) | Q2 (Median value) | Q3 (third<br>quartile) |  |  |
|-------------------|--|--|-----------------------|--|--------------------|------------------------|-------------------|------------------------|--|--|
| BUILDING GEOMETRY | Number of floors                             | n <sub>f</sub>   | -                     | -  | -                  | -                      | -                 | -                      |  |  |
|                   | Gross height                                 | Hg   | m                     | -  | -                  | -                      | -                 | -                      |  |  |
|                   | Footprint area                               | A <sub>footprint</sub>   | m²                    | -  | -                  | -                      | -                 | -                      |  |  |
|                   | Heated gross floor area                      | A <sub>H;g</sub>   | m²                    | -  | -                  | -                      | -                 | -                      |  |  |
|                   | Heated net floor area                        | A <sub>H;n</sub>   | m²                    | 248.5  | 430.7              | 82.5                   | 115.7             | 204.7                  |  |  |
|                   | Heated gross volume                          | V <sub>H;g</sub>   | m³                    | 1141.2                                       | 2368.4             | 336.7                  | 501.2             | 889.2                  |  |  |
|                   | Heated net volume                            | V <sub>H;n</sub>   | m³                    | 758.3  | 1441.7             | 231.3                  | 328.6             | 610.1                  |  |  |
| 2                 | Compactness ratio                            | A <sub>env</sub> /V <sub>H;g</sub>   | m <sup>-1</sup>       | 0.78   | 0.24               | 0.61                   | 0.84              | 0.97                   |  |  |
|                   | WWR – North orientation                      | WWR <sub>N</sub>   | -                     | -  | -                  | -                      | -                 | -                      |  |  |
| 5                 | WWR – South orientation                      | WWRs   | -                     | -  | -                  | -                      | -                 | -                      |  |  |
|                   | WWR – East orientation                       | WWR <sub>E</sub>   | -                     | -  | -                  | -                      | -                 | _                      |  |  |
|                   | WWR – West orientation                       | WWR <sub>w</sub>   | -                     | -  | -                  | -                      | -                 | -                      |  |  |
|                   | Window to useful floor area ratio            | A <sub>wi</sub> /A <sub>use</sub>  | -                     | 0.14   | 0.07               | 0.10                   | 0.12              | 0.16                   |  |  |
|                   | Roof type                                    |  |                       |  | -                  |                        |                   |                        |  |  |
|                   | <i>U</i> -value of the roof                  | U <sub>fl;up</sub>   | W/(m²·K)              | 0.90   | 1.03               | 0.25                   | 0.39              | 1.29                   |  |  |
|                   | External walls type                          | 7.1  |                       |  | -                  |                        | '                 |                        |  |  |
| Ĭ                 | <i>U</i> -value of the wall                  | U <sub>wl</sub>  | W/(m <sup>2</sup> ·K) | 0.72   | 0.79               | 0.27                   | 0.34              | 0.97                   |  |  |
| ENVELOPE          | Slab on ground floor type                    |  | ,                     |  | -                  |                        |                   |                        |  |  |
| 2                 | <i>U</i> -value of the floor                 | U <sub>fl;lw</sub>   | W/(m²⋅K)              | 0.82   | 0.75               | 0.25                   | 0.62              | 1.11                   |  |  |
| _                 | Windows type                                 | .,   | , ,                   |  | -                  |                        |                   |                        |  |  |
|                   | <i>U</i> -value of the windows               | Uw   | W/(m²⋅K)              | 2.68   | 1.33               | 1.71                   | 2.30              | 3.28                   |  |  |
|                   | Shading system type                          |  | , ,                   |  | -                  |                        |                   |                        |  |  |
| ,                 | Occupancy density *                          | O <sub>C</sub> person/m <sup>2</sup> UNI EN 16798-1 - Table A.19   |                       |  |                    |                        |                   |                        |  |  |
| ē                 | Lighting power density *                     | W <sub>L</sub>   |                       |  |                    |                        |                   |                        |  |  |
| ₹                 | Equipment power density *                    | W <sub>A</sub>   |                       |  |                    |                        |                   |                        |  |  |
| VENTILATION       | Type of ventilation                          | Natural: 93%; Mechanical: 7%   |                       |  |                    |                        |                   |                        |  |  |
| Ž                 | Air exchange rate *                          | n  | h-1                   | 0.30   | 0.00               | 0.30                   | 0.30              | 0.30                   |  |  |
|                   | Heating system type                          |  | link                  | nknown: 96%; Autonomous: 3%; Centralized: 1% |                    |                        |                   |                        |  |  |
|                   | Heating generator                            | Unknown: 37%; Traditional boiler: 23%; Condensing boiler: 19%; Fireplace: 15%; Air-source heat pump: 3%; Heat exchanger of district heating/cooling: 3%  |                       |  |                    |                        |                   |                        |  |  |
| THERMAL SYSTEMS   | Daily operating time of the heating system * | t <sub>H</sub>   | h                     | 14   | 0                  | 14                     | 14                | 14                     |  |  |
|                   | Energy carrier                               | Unknown: 40%; Natural gas: 16%; Electricity and natural gas: 15%; Solid biomass: 11%; Electricity and solid biomass: 9%; LPG: 4%; Electricity: 3%; District heating: 1%; Natural gas and solid biomass: 1% |                       |  |                    |                        |                   |                        |  |  |
| AL SYS            | Heating emission sub-<br>system              | Unknown: 35%; Radiators: 35%; Radiant panels: 19%; Air Ducts: 4%; Fan-coil: 4%; Air<br>Heater: 3%  |                       |  |                    |                        |                   |                        |  |  |
| Ē                 | Cooling system type                          | Unknown: 96%; Heat pump air-air: 3%; Heat pump air-water: 1%   |                       |  |                    |                        |                   |                        |  |  |
| 里                 | Daily operating time of the cooling system * | t <sub>C</sub>   | h                     | -  | -                  | -                      | -                 | -                      |  |  |
|                   | Cooling emission sub-system                  | -  |                       |  |                    |                        |                   |                        |  |  |
|                   | DHW system type                              |  |                       |  | -                  |                        |                   |                        |  |  |
|                   | DHW generator                                | Unknown: 58%; Condensing boiler: 23%; Natural gas boiler: 8%; Electric boiler: 5%; Solar thermal: 5%; Other: 1%  |                       |  |                    |                        |                   |                        |  |  |

**⊕** ⊕

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.








 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Entire multifamily blocks
 RES\_BLDGS\_

 Period of construction:
 2001 2001-\_E\_LIG

 Climatic zone:
 E
 Number of records:
 75

| ADDITIONAL DATA      |                                 |  |                 |   |                    |                        |                 |                     |  |  |  |
|----------------------|---------------------------------|--|-----------------|---|--------------------|------------------------|-----------------|---------------------|--|--|--|
|                      | Data                            | Symbol   | Unit of measure | Mean<br>value   | Standard deviation | Q1 (first<br>quartile) | Median<br>value | Q3 (third quartile) |  |  |  |
| GEOMETRY: apartments | Inter-storey height             | Hn   | m               | 3.3   | 0.5                | 3.0                    | 3.1             | 3.4                 |  |  |  |
|                      | Heated gross floor area         | A <sub>H;g</sub>   | m²              | -   | -                  | -                      | -               | -                   |  |  |  |
|                      | Heated net floor area           | A <sub>H;n</sub>   | m²              | -   | -                  | -                      | -               | -                   |  |  |  |
|                      | Heated gross volume             | V <sub>H;g</sub>   | m³              | -   | -                  | -                      | -               | -                   |  |  |  |
|                      | Heated net volume               | V <sub>H;n</sub>   | m³              | -   | -                  | -                      | -               | -                   |  |  |  |
| THERMAL SYSTEMS      | Heating efficiency or COP       | η <sub>H;gen</sub> or<br><i>COP</i> H;gen                | -               | This value has to be retrieved from suitable datasheets |                    |                        |                 |                     |  |  |  |
|                      | Total heating power *           | P <sub>H;gen</sub>                                       | kW              | 37.6  | 40.4               | 24.0                   | 27.0            | 32.0                |  |  |  |
|                      | Cooling efficiency or EER       | $\eta_{	extsf{C};gen}$ or $\mathit{EER}_{	extsf{C};gen}$ | -               | This value has to be retrieved from suitable datasheets |                    |                        |                 |                     |  |  |  |
|                      | Total cooling power *           | $P_{C;gen}$  | kW              | -   | -                  | -                      | -               | -                   |  |  |  |
|                      | Temperature of DHW              | $\theta_{W}$   | °C              | -   | -                  | -                      | -               | -                   |  |  |  |
| Ė                    | DHW system power *              | P <sub>W;gen</sub>                                       | kW              | 22.7  | 10.7               | 23.2                   | 24.3            | 28.0                |  |  |  |
|                      | * These values refer to the apa | rtment scale   |                 |   |                    |                        |                 |                     |  |  |  |

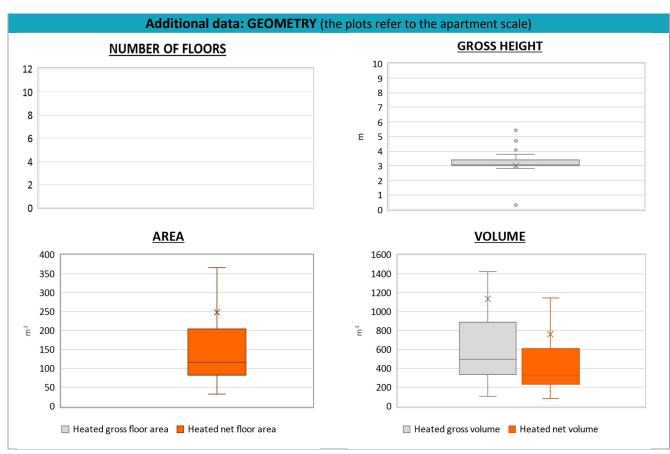





NOTE: Sample size of the analysed data.

Compactness ratio: 69; Window to useful floor area ratio: 15; U-value of the roof: 42; U-value of the wall: 69; U-value of the floor: 11; U-value of the windows: 75; Inter-storey height: 75; Heated net floor area: 75; Heated gross volume: 69; Heated net volume: 69; Total heating power: 38; DHW system power: 48; CO2 Emission: 72; EP\_H\_nren: 72; EP\_W\_nren: 68; EP\_GL\_nren: 71; EP\_H\_ren: 63; EP\_W\_ren: 58