

 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Single family houses
 RES_SINGLE_

 Period of construction:
 1961-1970
 1961-1970_D_LIG

 Climatic zone:
 D
 Number of records:
 6500

Description: Data sources:

External walls: no data available Roof slabs: no data available

EPC databases (100%)

	Data	Symbol	Unit of	Mean	Standard	Q1 (first	Q2 (Median	Q3 (third			
			measure	value	deviation	quartile)	value)	quartile)			
BUILDING GEOMETRY	Number of floors	n _f	-	-	-	-	-	-			
	Gross height	Hg	m	-	-	-	-	-			
	Footprint area	A _{footprint}	m²	-	-	-	-	-			
	Heated gross floor area	A _{H;g}	m²	-	-	-	-	-			
	Heated net floor area	A _{H;n}	m²	-	-	-	-	-			
	Heated gross volume	V _{H;g}	m³	-	-	-	-	-			
	Heated net volume	V _{H;n}	m³	-	-	-	-	-			
	Compactness ratio	A _{env} /V _{H;g}	m ⁻¹	0.57	0.31	0.31	0.51	0.74			
	WWR – North orientation	WWR _N	-	-	-	-	-	-			
BUI	WWR – South orientation	WWR _S	-	-	-	-	-	-			
	WWR – East orientation	WWR _E	-	-	-	-	-	-			
	WWR – West orientation	<i>WWR</i> _w	-	-	-	-	-	-			
	Window to useful floor area ratio	A _{wi} /A _{use}	-	0.11	0.04	0.09	0.10	0.12			
ENVELOPE	Roof type				-						
	<i>U</i> -value of the roof	U _{fl;up}	W/(m²·K)	1.38	0.65	0.94	1.54	1.75			
	External walls type			-							
	<i>U</i> -value of the wall	U _{wl}	W/(m²·K)	1.28	0.46	1.08	1.22	1.49			
	Slab on ground floor type	-									
	<i>U</i> -value of the floor	U _{fl;lw}	W/(m²·K)	1.53	0.47	1.40	1.55	1.70			
	Windows type		-								
	<i>U</i> -value of the windows	U _W	W/(m²·K)	4.05	1.16	3.11	4.31	4.87			
	Shading system type			-							
z	Occupancy density *	O _C	Oc person/m ² UNI EN 16798-1 - Table A.19								
GAINS and VENTILATION	Lighting power density *	W∟	W/m²	UNI EN 16798-1 - A.8.3							
NS .	Equipment power density *	W _A	W/m²	n ² UNI EN 16798-1 - A.8.3							
SAI	Type of ventilation			Natural: 100%							
~ >	Air exchange rate *	n	h ⁻¹	0.30	0.00	0.30	0.30	0.30			
	Heating system type			Unkn	own: 95%; Aı	utonomous: 5	%				
THERMAL SYSTEMS	Heating generator	Traditional boiler: 49%; Unknown: 32%; Condensing boiler: 16%; Air-source heat pump: 2%; Fireplace: 1%									
	Daily operating time of the heating system *	t _H	h	12	0	12	12	12			
	Energy carrier	Natural gas: 50%; Unknown: 32%; Electricity and natural gas: 14%; Electricity: 2%; Gas Oil: 1%; LPG: 1%									
	Heating emission sub-system	Radiators: 65%; Unknown: 32%; Radiant panels: 1%; Fan-coil: 1%; Air Ducts: 1%									
	Cooling system type	Unknown: 94%; Heat pump air-air: 6%									
	Daily operating time of the cooling system *	tc	h	-	-	-	-	-			
	Cooling emission sub-system	-									
	DHW system type	-									
	DHW generator	Unknown: 69%; Condensing boiler: 9%; Natural gas boiler: 9%; Electric boiler: 9%; Electric heat pump: 4%									
	* These values were not available in the considered sources, and are thus derived from UNI EN Standards										








 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Single family houses
 RES_SINGLE_1961-1970_D_LIG

 Period of construction:
 1961-1970
 Number of records:
 6500

ADDITIONAL DATA										
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)		
GEOMETRY: apartments	Inter-storey height	H _n	m	3.3	0.2	3.2	3.3	3.3		
	Heated gross floor area	A _{H;g}	m²	-	-	-	-	-		
	Heated net floor area	A _{H;n}	m²	92.0	224.6	58.0	73.4	92.5		
	Heated gross volume	V _{H;g}	m³	342.2	610.5	222.6	281.1	353.4		
	Heated net volume	V _{H;n}	m³	259.5	440.9	171.0	217.2	272.5		
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or <i>COP</i> _{H;gen}	-	This value has to be retrieved from suitable datasheets						
	Total heating power *	P _{H;gen}	kW	21.6	6.6	21.9	24.0	24.0		
	Cooling efficiency or EER	η _{C;gen} or <i>EER</i> _{C;gen}	-	This value has to be retrieved from suitable datasheets						
	Total cooling power *	P _{C;gen}	kW	-	-	-	-	-		
	Temperature of DHW	θ_{W}	°C	-	-	-	-	-		
	DHW system power *	$P_{ m W;gen}$	kW	18.5	9.3	13.4	24.0	24.0		

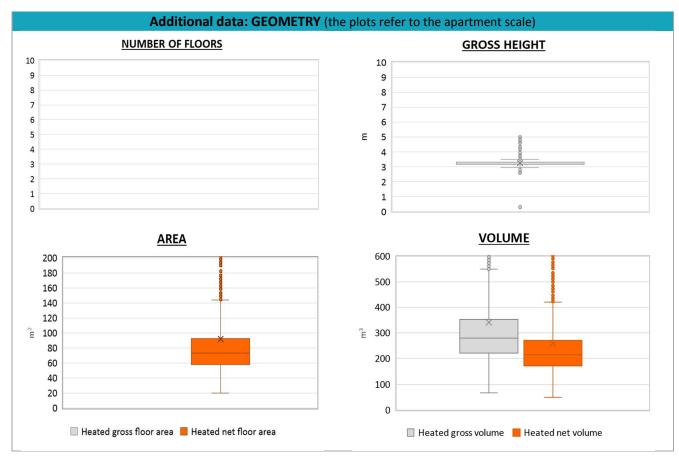





NOTE: Sample size of the analysed data.

Compactness ratio: 6464; Window to useful floor area ratio: 737; U-value of the roof: 877; U-value of the wall: 5593; U-value of the floor: 414; U-value of the windows: 6500; Inter-storey height: 6500; Heated net floor area: 6500; Heated gross volume: 6462; Heated net volume: 6461; Total heating power: 2147; DHW system power: 4149; CO2 Emission: 6370; EP_H_nren: 6479; EP_W_nren: 6233; EP_GL_nren: 6458; EP_H_ren: 5207; EP_W_nren: 4129