

 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Residential buildings - Single family houses
 RES_SINGLE_1962-1971_1971_E_VAL

 Climatic zone:
 E
 Number of records:
 41

 Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014):
 Data sources:

Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): External walls: hollow brick masonry with air gap (cod. MCV01).

<u>Roof slabs</u>: reinforced concrete floor slab for non-walkable flat roof (cod. COP01) or for pitched roof (cod. CIN04).

EPC databases (100%)

	Data	Symbol	Unit of	Mean	Standard	Q1 (first	Median	Q3 (third			
			measure	value	deviation	quartile)	value	quartile)			
BUILDING GEOMETRY	Number of floors	n _f	-	-	-	-	-	-			
	Gross height	H_{g}	m	-	-	-	-	-			
	Footprint area	$A_{\text{footprint}}$	m²	-	-	-	-	-			
	Heated gross floor area	$A_{H;g}$	m²	-	-	-	-	-			
	Heated net floor area	$A_{H;n}$	m²	107.5	55.3	62.9	103.3	136.8			
	Heated gross volume	$V_{H;g}$	m³	1016.9	3881.8	247.0	350.0	543.0			
	Heated net volume	$V_{H;n}$	m³	263.1	133.0	168.9	206.6	301.3			
	Compactness ratio	$A_{\rm env}/V_{\rm H;g}$	m ⁻¹	8.01	46.74	0.52	0.75	0.96			
9	WWR – North orientation	WWR _N	-	0.16	0.17	0.10	0.14	0.17			
BU	WWR – South orientation	<i>WWR</i> _S	-	0.16	0.17	0.10	0.14	0.17			
	WWR – East orientation	WWR _E	-	0.16	0.17	0.10	0.14	0.17			
	WWR – West orientation	WWR _W	-	0.16	0.17	0.10	0.14	0.17			
	Window to useful floor area	A _{wi} /A _{use}	-	37.15	212.39	0.14	0.17	0.21			
	ratio	, wij , use	-wwwuse								
	Roof type				-						
	<i>U</i> -value of the roof **	U _{fl;up}	W/(m²⋅K)	0.63	0.49	0.22	0.54	0.82			
	External walls type	Hollow brick masonry: 66%; Solid Brick masonry: 17%; Concrete wall: 7%; Unknown: 8%; Masonry with local stones: 2%									
DPE	<i>U</i> -value of the wall	$U_{ m wl}$	W/(m ² ·K)	0.96	0.41	0.74	0.93	1.30			
ENVELOPE	Slab on ground floor type				-						
	<i>U</i> -value of the floor **	$U_{fl;lw}$	W/(m ² ·K)	0.72	0.21	0.63	0.67	0.82			
	Windows type	Double glazing, wooden frame: 48%; Single glazing, wooden frame: 30%; Double glazing, PVC frame: 15%; Triple glazing, PVC frame: 7%									
	<i>U</i> -value of the windows	U_{W}	W/(m²⋅K)	2.72	1.27	1.42	2.74	3.26			
	Shading system type		-								
_ z	Occupancy density *	O _C	person/m²	UNI EN 16798-1 - Table A.19							
and TIO	Lighting power density *	W_{L}	W/m ²	UNI EN 16798-1 - A.8.3							
GAINS and ENTILATION	Equipment power density *	W _A	W/m²	UNI EN 16798-1 - A.8.3							
GAINS and VENTILATION	Type of ventilation			Natural: 100%							
>	Air exchange rate *	n	h ⁻¹	0.30	0.00	0.30	0.30	0.30			
THERMAL SYSTEMS	Heating system type	Autonomous: 100%									
	Heating generator	Boiler (unknown type): 68%; Condensing Boiler: 12%; Traditional Boiler: 7%; Air-source heat pump: 5%; Unknown: 4%; Fireplace: 2%; Heat exchanger of district heating/cooling: 2%									
	Daily operating time of the heating system *	t _H	h	14.0	0.0	14.0	14.0	14.0			
	Energy carrier	Natural Gas: 62%; Gas Oil: 26%; LPG: 10%; Solid biomass: 3%									
	Heating emission sub-system	-									
	Cooling system type	Absent: 98%; Air-cooled chiller: 2%									
	Daily operating time of the cooling system *	t _C	h	-	-	-	-	-			
	Cooling emission sub-system	-									
	DHW system type	Autonomous, coupled with heating: 44%; Autonomous, detached from heating: 39%; Centralized, coupled with heating: 12%; Centralized, detached from heating: 5%									
	DHW generator	Unknown: 76%; Natural gas boiler: 15%; Electric boiler: 5%; Electric Heat Pump: 4%									
	* These values are derived from UNI EN ISO Standards; ** U-values of the upper slab face the external environment, and the lower slab is in contact with the										
	ground										




 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Residential buildings - Single family houses
 RES_SINGLE_1962-1971_E_VAL

 Period of construction:
 1962 - 1971
 1971_E_VAL

 Climatic zone:
 E
 Number of records:
 41

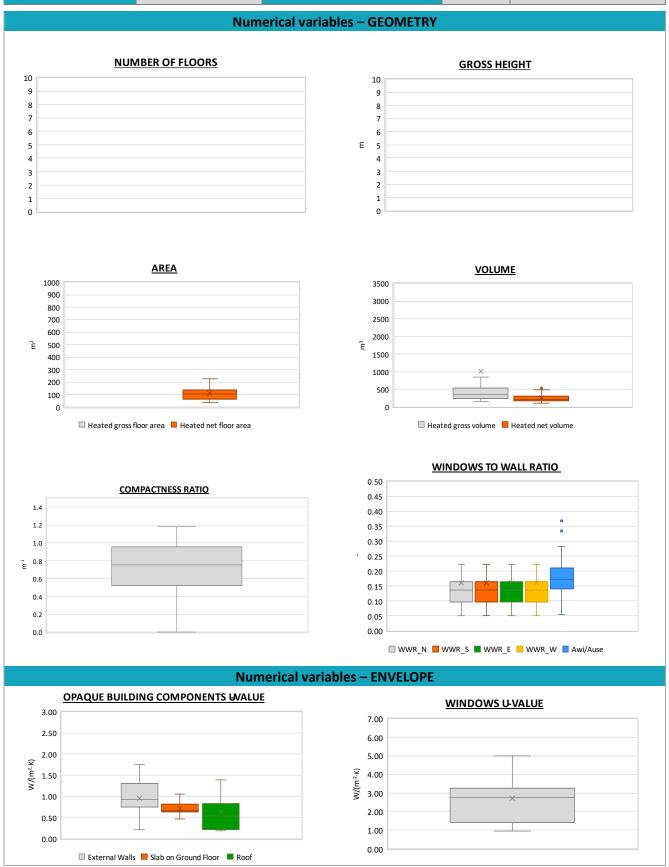

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.




 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Residential buildings - Single family houses
 RES_SINGLE_1962-1971_E_VAL

 Period of construction:
 1962 - 1971
 1971_E_VAL

 Climatic zone:
 E
 Number of records:
 41

ADDITIONAL DATA												
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)				
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or COP _{H;gen}	-	This value has to be retrieved from suitable datasheets								
	Total heating power	P _{H;gen}	kW	122.3	146.3	26.0	33.7	193.0				
	Cooling efficiency or EER	$\eta_{C;gen}$ or $\mathit{EER}_{C;gen}$	-	This value has to be retrieved from suitable datasheets								
	Total cooling power	P _{C;gen}	kW	10.2	0.0	10.2	10.2	10.2				
	Temperature of DHW	ϑw	°C	40.0	0.0	40.0	40.0	40.0				
	DHW system power	P _{W;gen}	kW	79.4	206.8	1.5	22.8	33.7				
	* This value refers to the building scale											

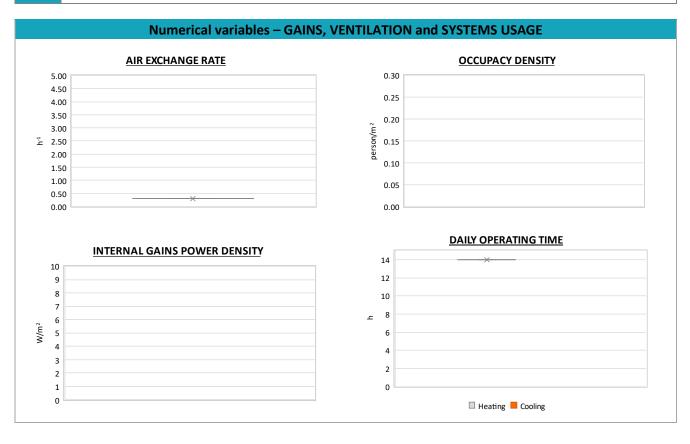



 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Residential buildings - Single family houses
 RES_SINGLE_1962-1962-1971_E_VAL

 Period of construction:
 1962 - 1971
 Number of records:
 41

