

Region:Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)Archetype code:Building category:Residential buildings - Single family housesRES_SINGLE_1972-1981_E_VALPeriod of construction:1972 - 19811981_E_VALClimatic zone:ENumber of records:38

Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): External walls: hollow brick masonry with thermal insulation (cod. MCV02).

Data sources: EPC databases (100%)

Roof slabs: reinforced concrete floor slab for non-walkable flat roof (cod. COP01) or for pitched roof (cod. CIN04).

(coa. cii	110-17.										
	Data	Symbol	Unit of	Mean	Standard	Q1 (first	Median	Q3 (third			
			measure	value	deviation	quartile)	value	quartile)			
BUILDING GEOMETRY	Number of floors	n _f	-	-	-	-	-	-			
	Gross height	Hg	m	-	-	-	-	-			
	Footprint area	A _{footprint}	m ²	-	-	-	-	-			
	Heated gross floor area	A _{H;g}	m ²	-	-	-	-	-			
	Heated net floor area	A _{H;n}	m ²	110.5	60.6	62.8	99.7	145.6			
	Heated gross volume	V _{H;g}	m³	423.5	257.7	248.5	350.7	535.0			
	Heated net volume	V _{H;n}	m³	237.0	117.9	149.1	219.1	285.7			
S S	Compactness ratio	A _{env} /V _{H;g}	m ⁻¹	0.65	0.24	0.46	0.63	0.80			
₽	WWR – North orientation	WWR _N	-	0.11	0.05	0.07	0.09	0.14			
BU	WWR – South orientation	WWR _S	-	0.11	0.05	0.07	0.09	0.14			
	WWR – East orientation	WWR _E	-	0.11	0.05	0.07	0.09	0.14			
	WWR – West orientation	WWR _W	-	0.11	0.05	0.07	0.09	0.14			
	Window to useful floor area ratio	A _{wi} /A _{use}	-	0.15	0.06	0.12	0.15	0.18			
	Roof type				-						
	<i>U</i> -value of the roof **	U _{fl;up}	W/(m²⋅K)	0.81	0.68	0.31	0.67	1.22			
	External walls type	Hollow bri	ck masonry: 68%	68%; Solid Brick masonry: 26%; Concrete wall: 3%; Masonry with local stones: 3%							
OPE	<i>U</i> -value of the wall	U_{wl}	W/(m²⋅K)	0.82	0.33	0.59	0.79	0.97			
Œ	Slab on ground floor type	-									
ENVELOPE	<i>U</i> -value of the floor **	$U_{fl;lw}$	W/(m²⋅K)	0.31	0.00	0.31	0.31	0.31			
	Windows type	Double glazing, wooden frame: 50%; Double glazing, PVC frame: 29%; Single glazing, wooden frame: 21%									
	<i>U</i> -value of the windows	U _W	W/(m²·K)	2.37	1.25	1.13	2.27	3.06			
	Shading system type			<u> </u>							
_ Z	Occupancy density *	<i>O</i> _C	person/m²	UNI EN 16798-1 - Table A.19							
anc TIO	Lighting power density *	W_{L}	W/m ²	UNI EN 16798-1 - A.8.3							
SI ₹	Equipment power density *	W _A	W/m ²	UNI EN 16798-1 - A.8.3							
GAINS and VENTILATION	Type of ventilation			Natural: 100%							
>	Air exchange rate *	n	h ⁻¹	0.30	0.00	0.30	0.30	0.30			
	Heating system type	Autonomous: 100%									
	Heating generator	Boiler (unknown type): 61%; Condensing Boiler: 13%; Traditional Boiler: 13%; Fireplace: 8%; Air- source heat pump: 3%; Heat exchanger of district heating/cooling: 2%									
	Daily operating time of the heating system *	t _H	h	14.0	0.0	14.0	14.0	14.0			
SIM S	Energy carrier		Natural Gas: 68%; Gas Oil: 16%; Solid biomass: 11%; LPG: 5%								
STE	Heating emission sub-system	-									
L S	Cooling system type	Absent: 100%									
THERMAL SYSTEMS	Daily operating time of the cooling system *	tc	h	-	-	-	-	-			
	Cooling emission sub-system	-									
	DHW system type	Autonomous, coupled with heating: 47%; Centralized, coupled with heating: 39%; Autonomous, detached from heating: 14%									
	DHW generator	Unknown: 68%; Natural gas boiler: 26%; Electric boiler: 3%; Electric Heat Pump: 3%									
	* These values are derived from UNI EN	NI EN ISO Standards; ** U-values of the upper slab face the external environment, and the lower slab is in contact with the									
ground											



Region:	egion: Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)				
Building category:	RES_SINGLE_1972-				
Period of construction:	1972 - 1981	1981_E_VAL			
Climatic zone:	E	Number of records:	38		



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.




 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Residential buildings - Single family houses
 RES_SINGLE_1972-1981

 Period of construction:
 1972 - 1981
 1981_E_VAL

 Climatic zone:
 E
 Number of records:
 38

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
. SYSTEMS	Heating efficiency or COP	$\eta_{\sf H;gen}$ or $ extit{COP}_{\sf H;gen}$	-	This value has to be retrieved from suitable datasheets				
	Total heating power	$P_{H;gen}$	kW	148.2	174.6	27.0	34.0	350.0
	Cooling efficiency or EER	η _{C;gen} or <i>EER</i> _{C;gen}	-	This value has to be retrieved from suitable datasheets				
Ā	Total cooling power	$P_{C;gen}$	kW	-	-	-	-	-
THERMAL	Temperature of DHW	$artheta_{W}$	°C	40.0	0.0	40.0	40.0	40.0
	DHW system power	$P_{ m W;gen}$	kW	132.9	173.3	21.0	32.2	306.3
	* This value refers to the building scale							

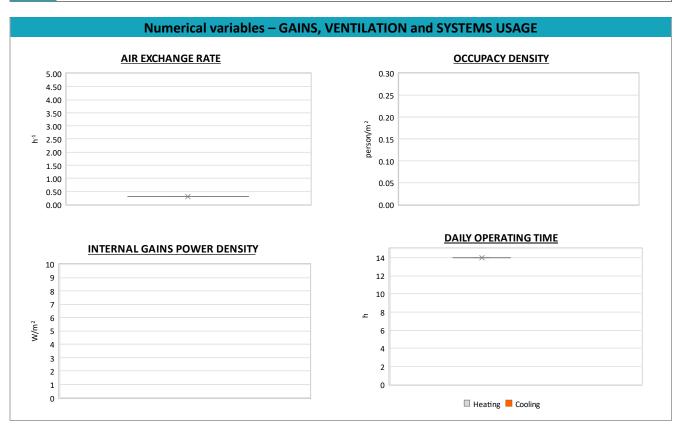



 Region:
 Aosta Valley (Aosta, Quart, Saint-Christophe, and Sarre)
 Archetype code:

 Building category:
 Residential buildings - Single family houses
 RES_SINGLE_1972-1981

 Period of construction:
 1972 - 1981
 Number of records:
 38

