

Description:

 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Single family houses
 RES_SINGLE_

 Period of construction:
 1991-2000
 1991-2000_E_LIG

Climatic zone: E Number of records: 105

External walls: no data available Roof slabs: no data available

Data sources: EPC databases (100%)

	Data	Symbol	Unit of	Mean	Standard	Q1 (first	Q2 (Median	Q3 (third			
			measure	value	deviation	quartile)	value)	quartile)			
BUILDING GEOMETRY	Number of floors	n _f	-	-	-	-	-	-			
	Gross height	Hg	m	-	-	-	-	-			
	Footprint area	A _{footprint}	m ²	-	-	-	-	-			
	Heated gross floor area	A _{H;g}	m ²	-	-	-	-	-			
	Heated net floor area	A _{H;n}	m ²	-	-	-	-	-			
	Heated gross volume	V _{H;g}	m ³	-	-	-	-	-			
	Heated net volume	V _{H;n}	m³	-	-	-	-	-			
	Compactness ratio	A _{env} /V _{H;g}	m ⁻¹	0.76	0.32	0.49	0.81	0.99			
	WWR – North orientation	WWR _N	-	-	-	-	-	-			
BU	WWR – South orientation	WWR _S	-	-	-	-	-	-			
	WWR – East orientation	WWR _E	-	-	-	-	-	-			
	WWR – West orientation	WWR _w	-	-	-	-	-	-			
	Window to useful floor area ratio	A _{wi} /A _{use}	-	-	-	-	-	-			
	Roof type	-									
	<i>U</i> -value of the roof	U _{fl;up}	W/(m²·K)	1.25	0.97	0.63	1.01	1.65			
OPE	External walls type				-						
	<i>U</i> -value of the wall	U_{wl}	W/(m²·K)	1.09	0.63	0.55	1.10	1.39			
ÆĽ	Slab on ground floor type	-									
ENVELOPE	<i>U</i> -value of the floor	U _{fl;lw}	W/(m²⋅K)	-	-	-	-	-			
	Windows type	-									
	<i>U</i> -value of the windows	U _W	W/(m²⋅K)	3.73	1.20	2.80	3.73	4.71			
	Shading system type		-								
_ z	Occupancy density *	<i>O</i> _C	person/m²	UNI EN 16798-1 - Table A.19							
GAINS and VENTILATION	Lighting power density *	W _L	W/m ²	UNI EN 16798-1 - A.8.3							
NS ILA	Equipment power density *	W _A	W/m²	UNI EN 16798-1 - A.8.3							
EN GA	Type of ventilation	Natural: 100%									
>	Air exchange rate *	n	h ⁻¹	0.30	0.00	0.30	0.30	0.30			
	Heating system type	Unknown: 97%; Autonomous: 3%									
	Heating generator	Traditional boiler: 42%; Unknown: 41%; Condensing boiler: 14%; Fireplace: 2%; Air-source heat pump: 1%									
EMS	Daily operating time of the heating system *	t _H	h	14	0	14	14	14			
	Energy carrier	Unknown: 43%; Natural gas: 32%; Electricity and natural gas: 11%; LPG: 10%; Electricity and solid biomass: 2%; Electricity: 1%; Electricity and gas oil: 1%									
.S.A.S.	Heating emission sub-system	Radiators: 56%; Unknown: 41%; Air Ducts: 1%; Radiant panels: 1%; Fan-coil: 1%									
AL 3	Cooling system type	Unknown: 96%; Heat pump air-air: 2%; Heat pump air-water: 1%; Heat pump water-air:1%									
THERMAL SYSTEMS	Daily operating time of the cooling system *	tc	h	-	-	-	-	-			
	Cooling emission sub-system	-									
	DHW system type	-									
	DHW generator	Unknown: 78%; Condensing boiler: 12%; Electric boiler: 5%; Natural gas boiler: 3%; Electric heat pump: 2%									
	* These values were not availa	e values were not available in the considered sources, and are thus derived from UNI EN Standards									



Region: Liguria Archetype code: **Building category:** Residential buildings - Single family houses RES_SINGLE_ 1991-2000_E_LIG 1991-2000 **Period of construction:** Climatic zone: Ε **Number of records: Numerical variables – GEOMETRY** WINDOWS TO WALL RATIO **COMPACTNESS RATIO** 0.50 1.6 0.45 1.4 0.40 1.2 0.35 0.30 € 0.8 0.25 0.6 0.20 0.15 0.4 0.10 0.2 0.05 0.0 ■ WWR_N ■ WWR_S ■ WWR_E ■ WWR_W ■ Awi/Ause **Numerical variables – ENVELOPE OPAQUE BUILDING COMPONENTS U-VALUE** WINDOWS U-VALUE 3.00 7.00 6.00 2.50 5.00 2.00 4.00 W·m-2·K-1 1.50 3.00 2.00 1.00 1.00 0.50 0.00 0.00 ■ External walls ■ Slab on ground floor ■ Roof Numerical variables - GAINS, VENTILATION and SYSTEMS USAGE (Standard Values) **AIR EXCHANGE RATE OCCUPANCY DENSITY** 1.00 0.30 0.90 0.25 0.80 0.70 0.20 people·m⁻² 0.60 h-1 0.50 0.15 0.40 0.10 0.30 0.20 0.05 0.10 0.00 0.00 INTERNAL GAINS POWER DENSITY **DAILY OPERATING TIME** 10 20 9 18 8 16 7 14 6 12 5 10 3 6 4 2 1 2 0 The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its




 Region:
 Liguria
 Archetype code:

 Building category:
 Residential buildings – Single family houses
 RES_SINGLE_

 Period of construction:
 1991-2000
 1991-2000_E_LIG

 Climatic zone:
 E
 Number of records:
 105

ADDITIONAL DATA											
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)			
GEOMETRY: apartments	Inter-storey height	H _n	m	3.1	0.2	3.0	3.0	3.2			
	Heated gross floor area	A _{H;g}	m²	-	-	-	-	-			
	Heated net floor area	A _{H;n}	m²	99.9	63.2	61.9	81.0	118.0			
	Heated gross volume	$V_{H;g}$	m³	400.7	323.0	236.9	310.3	435.1			
	Heated net volume	V _{H;n}	m³	282.6	202.4	166.3	227.9	315.7			
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or <i>COP</i> H;gen	-	This value has to be retrieved from suitable datasheets							
	Total heating power *	P _{H;gen}	kW	25.7	2.9	24.0	24.0	27.7			
	Cooling efficiency or EER	η _{C;gen} or EER _{C;gen}	-	This value has to be retrieved from suitable datasheets							
	Total cooling power *	P _{C;gen}	kW	-	-	-	-	-			
	Temperature of DHW	θ_{W}	°C	-	-	-	-	-			
	DHW system power *	$P_{ m W;gen}$	kW	23.2	8.5	23.5	24.0	26.5			
	* These values refer to the apartment scale										

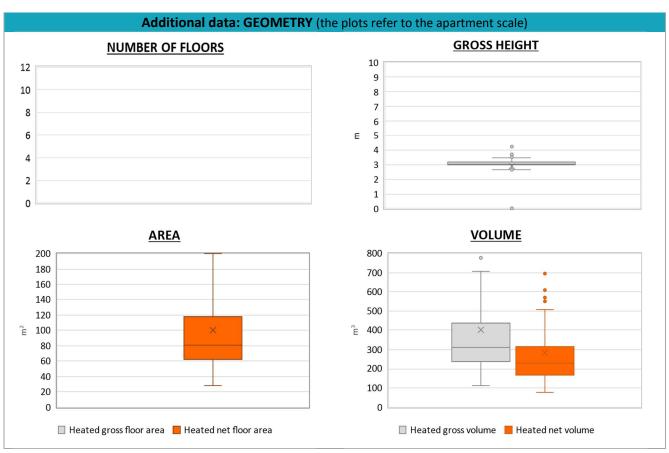





NOTE: Sample size of the analysed data.

Compactness ratio: 98; U-value of the roof: 39; U-value of the wall: 97; U-value of the windows: 105; Inter-storey height: 98; Heated net floor area: 98; Heated gross volume: 98; Heated net volume: 98; Total heating power: 48; DHW system power: 73; CO2 Emission: 102; EP_H_nren: 105; EP_W_nren: 93; EP_GL_nren: 105; EP_H_ren: 67; EP_W_ren: 53