

Region:		Trentino Alto Adige						Archetype code:			
Building category:		Residential b	uildings-Sing	gle family				RES_SINGLE	1930_E_TN		
Period of construction:		<1930						_			
		E	Number of records: 2177								
		s and slabs re	s and slabs refer to the structures described in UNI/TR 11552:2014):					Data sources:			
Externa	<u>l walls:</u> no data av i <u>bs</u> : no data availa	ailable					,		100%)		
	Data		Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)		
	Number of floor	rs	nf	-	-	-	-	-	-		
	Gross height		Hg	m	-	-	-	-	-		
	Footprint area		A _{footprint}	m²	-	-	-	-	-		
	Heated gross floor area		A _{H;g}	m²	-	-	-	-	-		
TR	Heated net floor area		A _{H;n}	m²	136	82	93	110	145		
M E	Heated gross vo	Heated gross volume		m ³	-	-	-	-	-		
E E	Heated net volu	ime	V _{H;g} V _{H;n}	m ³	572	423	382	459	602		
BUILDING GEOMETRY	Compactness ratio		A _{env} /V _{H;g}	m ⁻¹	0.61	0.19	0.50	0.62	0.71		
DIN	WWR – North o		WWR _N	-	-	-	-	-	-		
Ы	WWR – South o		WWRs	_	-	-	_	_	-		
8	WWR – East ori		WWRE	_	-	-	_	_	-		
	WWR – West or		WWRw	_	-	-	-	-	-		
	Window to useful floor area		A _{wi} /A _{use}	-	-	-	-	-	-		
	Roof type					-					
	<i>U</i> -value of the roof		U _{fl;up}	W/(m²⋅K)	-	-	-	-	-		
	External walls ty	/pe				-					
E	<i>U</i> -value of the wall		U _{wl}	W/(m²⋅K)	-	-	-	-	-		
ELC	Slab on ground	floor type				-					
ENVELOPE	<i>U</i> -value of the floor		U _{fl;lw}	W/(m²·K)	-	-	-	-	-		
_	Windows type					-					
	U-value of the windows		Uw	W/(m²·K)	-	-	-	-	-		
	Shading system	type				-					
z	Occupancy dens	Occupancy density *		<i>O</i> _C person/m ² UNI EN 16798-1 - Table A.19							
Pun NOI	Lighting power	Lighting power density *		W/m ²							
NS a	Equipment pow	ipment power density *		WL W/m² UNI EN 16798-1 - A.8.3 WA W/m² UNI EN 16798-1 - A.8.3							
GAINS an VENTILATI	Type of ventilat					Natural:	100%				
2 2	Air exchange ra	te *	n	h⁻¹	0.30	-	0.30	0.30	0.30		
	Heating system	type	Unknown: 75%, Autonomous: 22%, Centralized: 3%								
THERMAL SYSTEMS	Heating generat	tor	Traditional boiler: 37%, Boiler (Unknown): 25%, Condensing boiler: 24%, Unknown: 7%, Air source heat pump: 4%, Fireplace: 2%, DHC: 1%								
	Daily operating heating system		t _H	h	14	-	14	14	14		
	Energy carrier	ergy carrier		Natural gas: 84%, Gas Oil: 6%, Solid Biomass: 4%, Electricity: 3%, LPG: 2%, District heating: 1%							
	Heating emissio	n sub-system	-								
	Cooling system	ooling system type		Unknown: 96%, Absorption chiller: 4%							
	Daily operating time of the cooling system *		tc	h	-	-	-	-	-		
F	Cooling emissio	n sub-system	system								
	DHW system ty	pe	Unknown: 45%, Autonomous - coupled with heating: 43%, Autonomous - detached from heating: 10%, Centralized - coupled with heating: 2%, District heating: 1%,								
	DHW generator		U	Unknown: 46%, Natural gas boiler: 45%, Electric boiler: 5%, Electric Heat pump: 4%							
	* These values were	re not available in the considered sources, and are thus derived from NI EN Standards									







(c) (1) =


The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Residential buildings-Single family - <1930 - Zone E - Trentino Alto Adige



Region:	Trentino Alto Adige	Archetype code:		
Building category:	Residential buildings-Sin	RES_SINGLE1930_E_TN		
Period of construction:	eriod of construction: <1930			
Climatic zone:	E	Number of records:	2177	

ADDITIONAL DATA									
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)	
THERMAL SYSTEMS	Heating efficiency or COP	$\eta_{ m H;gen}{ m or}$ $COP_{ m H;gen}$	-	This value has to be retrieved from suitable datasheets					
	Total heating power	P _{H;gen}	kW	32	77	24	26	30	
	Cooling efficiency or EER	$\eta_{ ext{C;gen}}$ or $\textit{EER}_{ ext{C;gen}}$	-	This value has to be retrieved from suitable datasheets					
	Total cooling power	P _{C;gen}	kW	18	53	4	5	14	
	Temperature of DHW	ϑw	°C	40	-	40	40	40	
	DHW system power	P _{W;gen}	kW	32	7	24	26	30	

Additional data: GEOMETRY

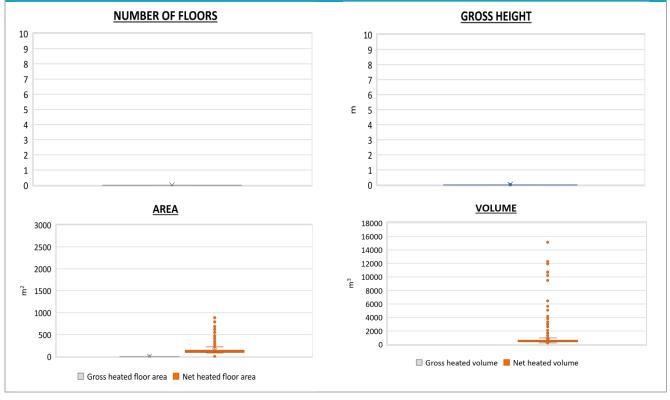



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Residential buildings-Single family - <1930 - Zone E - Trentino Alto Adige



