


Region: Trent		Trentino	no						Archetype code:	
Building category: Residential		single build	ings	RES_SINGLE_						
Period of construction: 2001-2010				2001-20	10_F_TN					
Climatic zone: F		Number of records: 2491								
Description (the codes associated with wa		alls and slabs	refer to the stru			1552:2014):	Data s	ources:		
-	walls: no data av							EPC databa	ases (100%)	
Roof sla	<u>bs</u> : no data availa	able								
	Data		Symbol	Unit of	Mean	Standard	Q1 (first	Median	Q3 (third	
	Dutu		Symbol	measure	value	deviation	quartile)	value	quartile)	
	Number of floors		nf	-	-	-	-	-	-	
	Gross height		Hg	m	-	-	-	-	-	
	Footprint area		A _{footprint}	m²	-	-	-	-	-	
~	Heated gross floor area		A _{H;g}	m²	-	-	-	-	-	
TR	Heated net floor area		A _{H;n}	m²	100	129	64	83	104	
BUILDING GEOMETRY	Heated gross volume		V _{H;g}	m ³	-	-	-	-	-	
	Heated net volume		V _{H;n}	m ³	385	573	231	299	395	
	Compactness ratio		$A_{\rm env}/V_{\rm H;g}$	m-1	0.64	0.18	0.52	0.65	0.75	
	WWR – North orientation		WWR _N	-	-	-	-	-	-	
	WWR – South orientation		WWRs	-	-	-	-	-	-	
	WWR – East orientation		WWR _E	-	-	-	-	-	-	
	WWR – West orientation		WWR _w	-	-	-	-	-	-	
	Window to use	ful floor	A _{wi} /A _{use}	-	-	-	-	-	-	
	area ratio									
	Roof type)A///m22/K)		-				
	U-value of the r		U _{fl;up}	W/(m²⋅K)	-	-	-	-	-	
щ	External walls to U-value of the v) A / // ma 2 //)		-				
ENVELOPE		-	U _{wl}	W/(m²⋅K)	-	-	-	-	-	
IVE	Slab on ground)A///m2/K)	_	-		_	-	
Ē	U-value of the floor		U _{fl;lw}	W/(m²⋅K)	-	-	-	-	-	
	Windows type			W/(m²·K)	-	-		_	-	
	U-value of the windows		Uw	VV/(III-·K)	-		-	-	-	
	Shading system type		O _C	person/m ²	- /m ² UNI EN 16798-1					
Pu NOI	Occupancy density * Lighting power density *		WL	W/m ²			UNI EN 1679			
	Equipment power density *				00011010738-1					
GAINS a ENTILAT	*	ier density	WA	W/m ²			UNI EN 1679	8-1		
GAINS a VENTILAT	Type of ventilat	ion		1	1	Natural: 10	0%			
-	Air exchange ra	te *	n	h-1	0.3	-	0.3	0.3	0.3	
	Heating system	type		ι	Jnknown 68%;	Autonomous:	21%; Centralize	d: 11%	· ·	
	Heating genera	tor	Boiler (unknown type): 98%; Air-source heat pump: 1%; Fireplace: 1%							
THERMAL SYSTEMS	Daily operating heating system	Daily operating time of the beating system *		h	No limitation					
	Energy carrier		Electricity: 66%; District heating: 30%; Electricity from PV, wind turbines, hydraulic turbines: 3%; Distric cooling: 1%							
	Heating emission sub-									
	system		Unknown: 99%; Air-cooled chiller: 1%							
	Cooling system type Daily operating time of the									
	cooling system *		t _C h No limitation							
	Cooling emission sub-									
	system		-							
	DHW system ty	ре	Autonomous – coupled with heating: 49%; Unknown: 37%; Centralized – coupled with heating: 9%; Autonomous - detached from heating: 3%; District heating: 2%							
	DHW generator Natural gas boiler: 82%; Unknown 11%; electric heat pump: 4%; Electric boiler: 2%; Solar thermal: 1%									
	* These values were not available in the considered sources, and are thus derived from UNI EN Standards									



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Residential single buildings – 2001/2010 – Zone F – Trentino



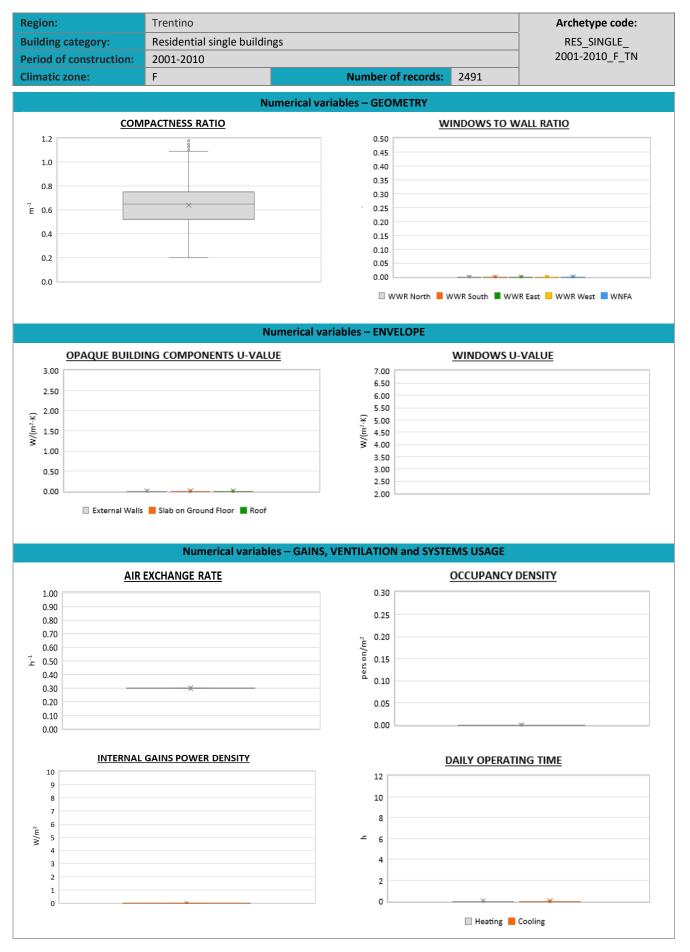

(c) (1)

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source. Residential single buildings - 2001/2010 - Zone F - Trentino



Region:	Trentino	Archetype code:				
Building category: Residential single buildings				RES_SINGLE_		
Period of construction:	Period of construction: 2001-2010			2001-2010_F_TN		
Climatic zone:	F	Number of records:	2491			

ADDITIONAL DATA									
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)	
THERMAL SYSTEMS	Heating efficiency or COP	η _{H;gen} or COP _{H;gen}	-	This value has to be retrieved from suitable datasheets					
	Total heating power	P _{H;gen}	kW	39	55	24	32	80	
	Cooling efficiency or EER	η _{C;gen} or EER _{C;gen}	-	This value has to be retrieved from suitable datasheets					
	Total cooling power	P _{C;gen}	kW	20	23	4	22	35	
	Temperature of DHW	ϑw	°C	40	-	40	40	40	
	DHW system power	P _{W;gen}	kW	41	124	24	30	63	

