


Region:	Piedmont						Archetype code: OFF_1981-1990_E_PIE	
Building category:	Non-residential buildings - Offices							
Period of construction:	1981-1990							
Climatic zone:	E	Number of records:				122		
Description (the codes associated with walls and slabs refer to the structures described in UNI/TR 11552:2014): External walls: hollow brick masonry with thermal insulation (cod. MCV02) or prefabricated insulated concrete wall (cod. MPF03). Roof slabs: insulated reinforced concrete floor slab for walkable flat roof (cod. COP03), for pitched roof (cod. CIN03) or insulated wooden floor slab for pitched roof (cod. CIN02).							Data sources: EPC databases (100%)	
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
BUILDING GEOMETRY	Number of floors	n_f	-	-	-	-	-	-
	Gross height	H_g	m	-	-	-	-	-
	Footprint area	$A_{\text{footprint}}$	m ²	-	-	-	-	-
	Heated gross floor area	$A_{H,g}$	m ²	-	-	-	-	-
	Heated net floor area	$A_{H,n}$	m ²	1137.3	2249.2	163.6	425.8	1170.2
	Heated gross volume	$V_{H,g}$	m ³	5071.8	9591.7	614.5	1667.6	6178.1
	Heated net volume	$V_{H,n}$	m ³	-	-	-	-	-
	Compactness ratio	$A_{\text{env}}/V_{H,g}$	m ⁻¹	0.61	0.29	0.41	0.57	0.74
	WWR – North orientation	WWR_N	-	-	-	-	-	-
	WWR – South orientation	WWR_S	-	-	-	-	-	-
	WWR – East orientation	WWR_E	-	-	-	-	-	-
	WWR – West orientation	WWR_W	-	-	-	-	-	-
	Window to useful floor area ratio	A_{wi}/A_{use}	-	0.18	0.10	0.11	0.16	0.22
	ENVELOPE	Roof type	-					
U-value of the roof		$U_{fi,up}$	W/(m ² ·K)	-	-	-	-	-
External walls type		Hollow brick masonry: 43%; Prefabricated panels: 31%; Solid Brick masonry: 15%; Unknown: 6%; Concrete wall: 5%						
U-value of the wall		U_{wl}	W/(m ² ·K)	-	-	-	-	-
Slab on ground floor type		-						
U-value of the floor		$U_{fi,lw}$	W/(m ² ·K)	-	-	-	-	-
Windows type		-						
U-value of the windows		U_w	W/(m ² ·K)	3.13	1.32	2.28	2.96	4.13
Shading system type		-						
GAINS and VENTILATION	Occupancy density *	O_c	person/m ²	UNI EN 16798-1 - Table A.19				
	Lighting power density *	W_L	W/m ²	UNI EN 16798-1 - A.8.3				
	Equipment power density *	W_A	W/m ²	UNI EN 16798-1 - A.8.3				
	Type of ventilation	-						
	Air exchange rate *	n	h ⁻¹	-	-	-	-	-
THERMAL SYSTEMS	Heating system type	Autonomous: 100%						
	Heating generator	-						
	Daily operating time of the heating system *	t_H	h	14.00	0.00	14.00	14.00	14.00
	Energy carrier	Natural Gas: 90%; Electricity: 5%; LPG: 3%; Solid biomass: 2%						
	Heating emission sub-system	-						
	Cooling system type	-						
	Daily operating time of the cooling system *	t_C	h	-	-	-	-	-
	Cooling emission sub-system	-						
	DHW system type	Autonomous, detached from heating: 48%; Centralized, coupled with heating: 24%; Autonomous, coupled with heating: 22%; Centralized, detached from heating: 6%						
	DHW generator	-						
	* These values are derived from UNI EN ISO Standards							


Region:	Piedmont			Archetype code: OFF_1981-1990_E_PIE
Building category:	Non-residential buildings - Offices			
Period of construction:	1981-1990			
Climatic zone:	E	Number of records:	122	

Numerical variables – GEOMETRY


NUMBER OF FLOORS

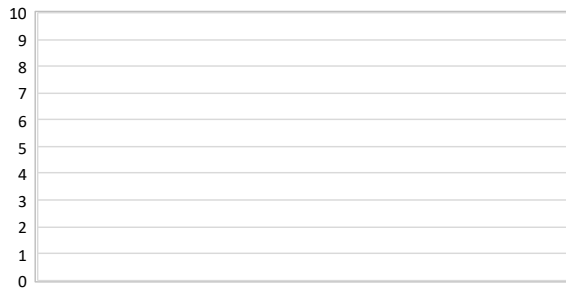


GROSS HEIGHT

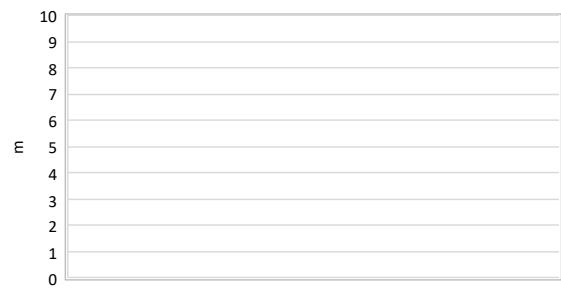


AREA

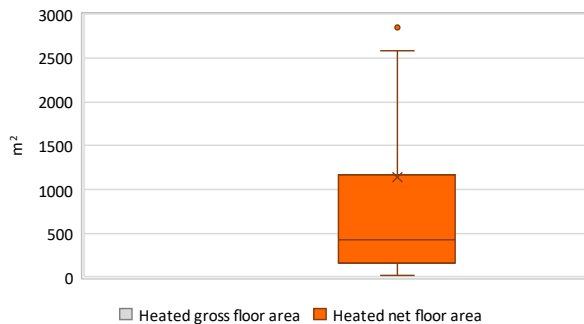


VOLUME

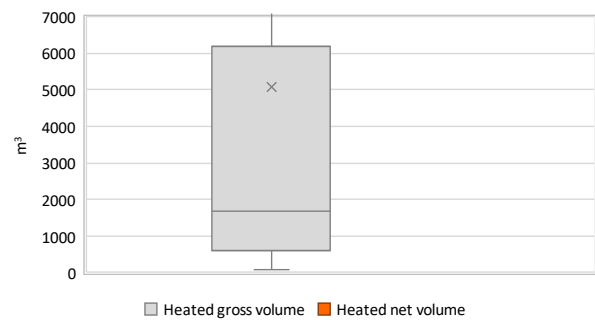

COMPACTNESS RATIO

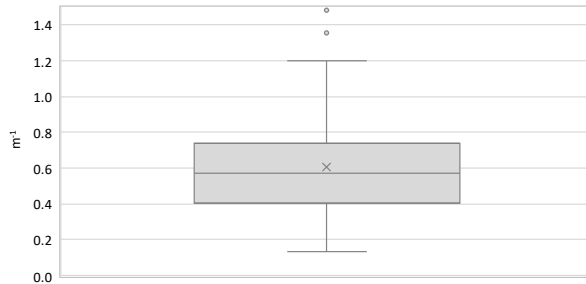

WINDOWS TO WALL RATIO

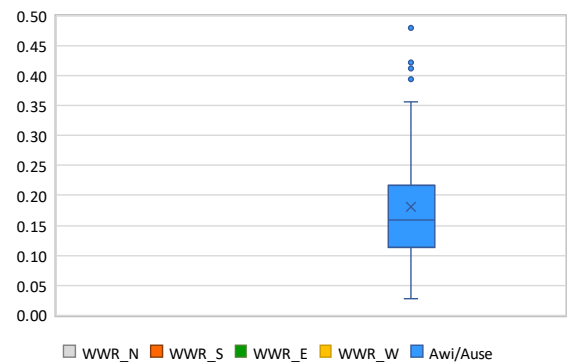


Numerical variables – ENVELOPE

OPAQUE BUILDING COMPONENTS U-VALUE




WINDOWS U-VALUE

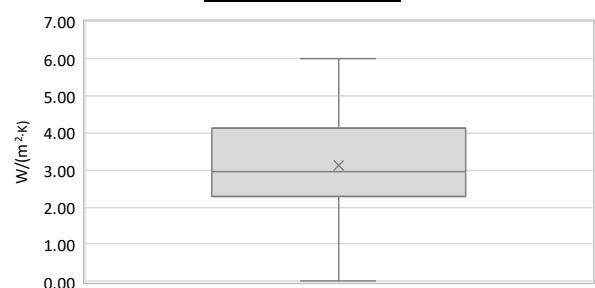

The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.

Region:	Piedmont	Archetype code: OFF_1981-1990_E_PIE
Building category:	Non-residential buildings - Offices	
Period of construction:	1981-1990	
Climatic zone:	E	
Number of records:		122

ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
THERMAL SYSTEMS	Heating efficiency or <i>COP</i>	$\eta_{H,gen}$ or $COP_{H,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total heating power	$P_{H,gen}$	kW	166.0	353.2	24.4	70.0	174.0
	Cooling efficiency or <i>EER</i>	$\eta_{C,gen}$ or $EER_{C,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total cooling power	$P_{C,gen}$	kW	96.2	139.3	12.5	34.0	134.4
	Temperature of DHW	ϑ_W	°C	40.0	0.0	40.0	40.0	40.0
	DHW system power	$P_{W,gen}$	kW	57.8	119.8	1.5	22.9	32.1

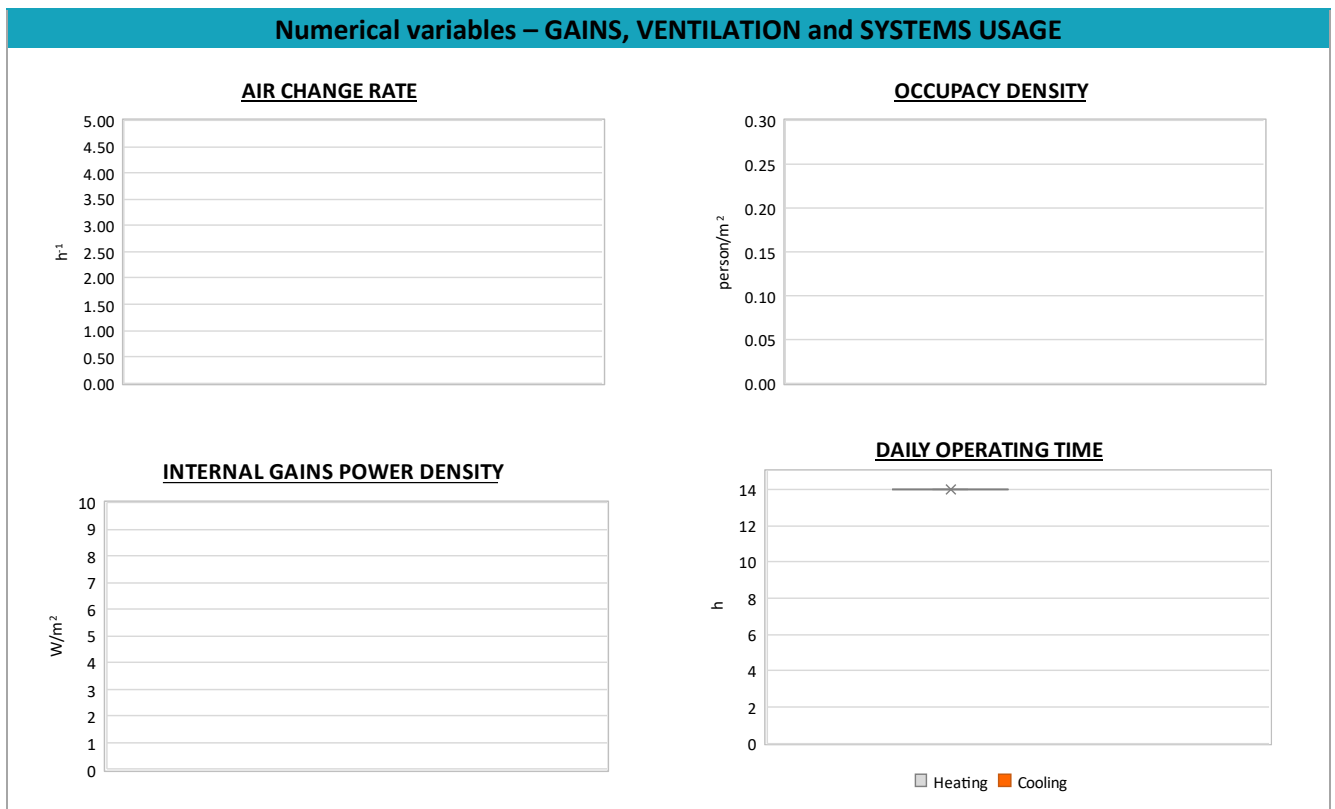


Region:	Piedmont	Archetype code: OFF_1981-1990_E_PIE
Building category:	Non-residential buildings - Offices	
Period of construction:	1981-1990	
Climatic zone:	E	
Number of records:		122

Additional data: other numerical variables that are not included in the archetype


DHW SUPPLY TEMPERATURE




SYSTEM POWER

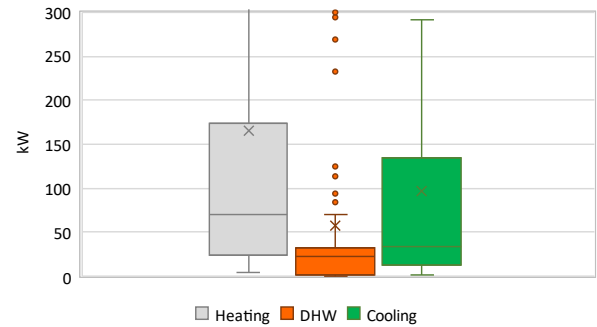


CO₂ EMISSION

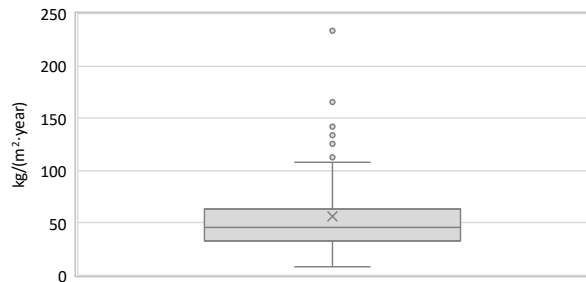

HEATING SYSTEM INSTALLATION YEAR

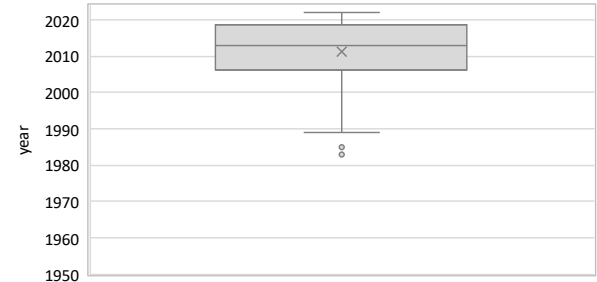

NON-RENEWABLE PRIMARY ENERGY USE

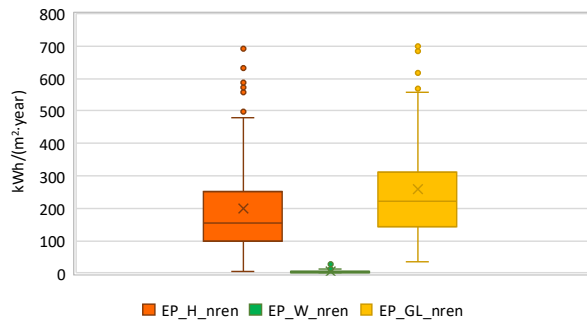

RENEWABLE PRIMARY ENERGY USE

