


Region:	Liguria		Archetype code: RES_BLDGS_ 1971-1980_D_LIG							
Building category:	Residential buildings – Entire multifamily blocks									
Period of construction:	1971-1980									
Climatic zone:	D	Number of records:					321			
Description: <u>External walls</u> : no data available <u>Roof slabs</u> : no data available							Data sources: EPC databases (100%)			
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Q2 (Median value)	Q3 (third quartile)		
BUILDING GEOMETRY	Number of floors	$n_f$	-	-	-	-	-	-		
	Gross height	$H_g$	m	-	-	-	-	-		
	Footprint area	$A_{\text{footprint}}$	m <sup>2</sup>	-	-	-	-	-		
	Heated gross floor area	$A_{H,g}$	m <sup>2</sup>	-	-	-	-	-		
	Heated net floor area	$A_{H,n}$	m <sup>2</sup>	975.2	2160.3	79.2	142.4	540.0		
	Heated gross volume	$V_{H,g}$	m <sup>3</sup>	4077.2	9247.9	325.1	589.4	2089.1		
	Heated net volume	$V_{H,n}$	m <sup>3</sup>	3185.5	7181.6	232.3	407.7	1654.9		
	Compactness ratio	$A_{\text{env}}/V_{H,g}$	m <sup>-1</sup>	0.67	0.28	0.41	0.69	0.90		
	WWR – North orientation	$WWR_N$	-	-	-	-	-	-		
	WWR – South orientation	$WWR_S$	-	-	-	-	-	-		
	WWR – East orientation	$WWR_E$	-	-	-	-	-	-		
	WWR – West orientation	$WWR_W$	-	-	-	-	-	-		
	Window to useful floor area ratio	$A_{wi}/A_{\text{use}}$	-	0.11	0.03	0.09	0.10	0.12		
ENVELOPE	Roof type	-								
	U-value of the roof	$U_{f,\text{up}}$	W/(m <sup>2</sup> ·K)	1.37	0.79	0.72	1.50	1.78		
	External walls type	-								
	U-value of the wall	$U_{wl}$	W/(m <sup>2</sup> ·K)	1.23	0.53	0.92	1.21	1.49		
	Slab on ground floor type	-								
	U-value of the floor	$U_{f,\text{lw}}$	W/(m <sup>2</sup> ·K)	1.59	0.64	1.35	1.57	1.84		
	Windows type	-								
	U-value of the windows	$U_w$	W/(m <sup>2</sup> ·K)	3.90	1.25	3.00	3.92	4.92		
GAINS and VENTILATION	Shading system type	-								
	Occupancy density *	$O_c$	person/m <sup>2</sup>	UNI EN 16798-1 - Table A.19						
	Lighting power density *	$W_L$	W/m <sup>2</sup>	UNI EN 16798-1 - A.8.3						
	Equipment power density *	$W_A$	W/m <sup>2</sup>	UNI EN 16798-1 - A.8.3						
	Type of ventilation	Natural: 95%; Mechanical: 5%								
THERMAL SYSTEMS	Air exchange rate *	$n$	h <sup>-1</sup>	0.30	0.00	0.30	0.30	0.30		
	Heating system type	Unknown: 91%; Autonomous: 7%; Centralized: 2%								
	Heating generator	Traditional boiler: 44%; Unknown: 34%; Condensing boiler: 16%; Air-source heat pump: 4%; Fireplace: 2%								
	Daily operating time of the heating system *	$t_H$	h	12	0	12	12	12		
	Energy carrier	Natural gas: 44%; Unknown: 33%; Electricity and natural gas: 11%; Electricity: 4%; LPG: 3%; Gas Oil: 2%; Electricity and solid biomass: 1%; Solid biomass: 1%; Electricity and gas oil: 1%								
	Heating emission sub-system	Radiators: 58%; Unknown: 33%; Fan-coil: 3%; Air Ducts: 3%; Radiant panels: 2%; Air Heater: 1%								
	Cooling system type	Unknown: 85%; Heat pump air-air: 11%; Heat pump air-water: 3%; Heat pump water-water: 1%								
	Daily operating time of the cooling system *	$t_C$	h	-	-	-	-	-		
	Cooling emission sub-system	-								
	DHW system type	-								
	DHW generator	Unknown: 73%; Condensing boiler: 11%; Electric boiler: 9%; Natural gas boiler: 3%; Electric heat pump: 2%; Solar thermal: 2%								
* These values were not available in the considered sources, and are thus derived from UNI EN Standards										

Region:	Liguria	Archetype code: RES_BLDGS_ 1971-1980_D_LIG
Building category:	Residential buildings – Entire multifamily blocks	
Period of construction:	1971-1980	
Climatic zone:	D	
Number of records:		321

### Numerical variables – GEOMETRY

#### COMPACTNESS RATIO

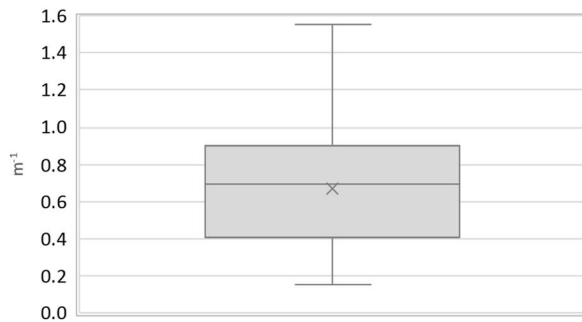


#### WINDOWS TO WALL RATIO



WWR\_N WWR\_S WWR\_E WWR\_W Awi/Ause


### Numerical variables – ENVELOPE

#### OPAQUE BUILDING COMPONENTS U-VALUE

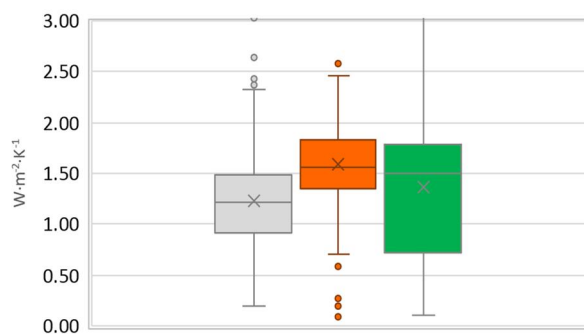

External walls Slab on ground floor Roof

#### WINDOWS U-VALUE

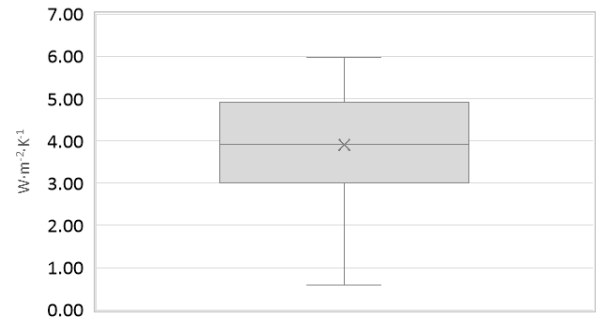

### Numerical variables – GAINS, VENTILATION and SYSTEMS USAGE (Standard Values)


#### AIR EXCHANGE RATE



#### OCCUPANCY DENSITY



#### INTERNAL GAINS POWER DENSITY

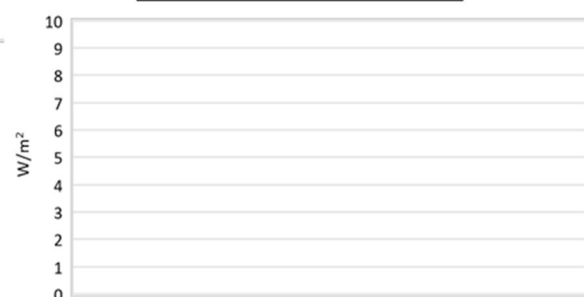

#### DAILY OPERATING TIME




Heating Cooling



The data can be used for analysis, modeling, and research purposes, as long as it remains unaltered in its original form. Users are free to publish results based on the data, provided they credit the original source.


Region:		Liguria				Archetype code: RES_BLDGS_ 1971-1980_D_LIG		
Building category:		Residential buildings – Entire multifamily blocks						
Period of construction:		1971-1980						
Climatic zone:		D	Number of records:		321			
ADDITIONAL DATA								
	Data	Symbol	Unit of measure	Mean value	Standard deviation	Q1 (first quartile)	Median value	Q3 (third quartile)
GEOMETRY: apartments	Inter-storey height	$H_n$	m	3.5	1.0	3.1	3.3	3.5
	Heated gross floor area	$A_{H,g}$	m <sup>2</sup>	-	-	-	-	-
	Heated net floor area	$A_{H;n}$	m <sup>2</sup>	-	-	-	-	-
	Heated gross volume	$V_{H,g}$	m <sup>3</sup>	-	-	-	-	-
	Heated net volume	$V_{H;n}$	m <sup>3</sup>	-	-	-	-	-
THERMAL SYSTEMS	Heating efficiency or <i>COP</i>	$\eta_{H,gen}$ Or $COP_{H,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total heating power *	$P_{H,gen}$	kW	78.9	116.9	24.0	26.0	53.3
	Cooling efficiency or <i>EER</i>	$\eta_{C,gen}$ Or $EER_{C,gen}$	-	This value has to be retrieved from suitable datasheets				
	Total cooling power *	$P_{C,gen}$	kW	-	-	-	-	-
	Temperature of DHW	$\theta_W$	°C	-	-	-	-	-
	DHW system power *	$P_{W,gen}$	kW	18.7	10.6	7.0	24.0	25.5
	* These values refer to the apartment scale							

### Additional data: GEOMETRY (the plots refer to the apartment scale)

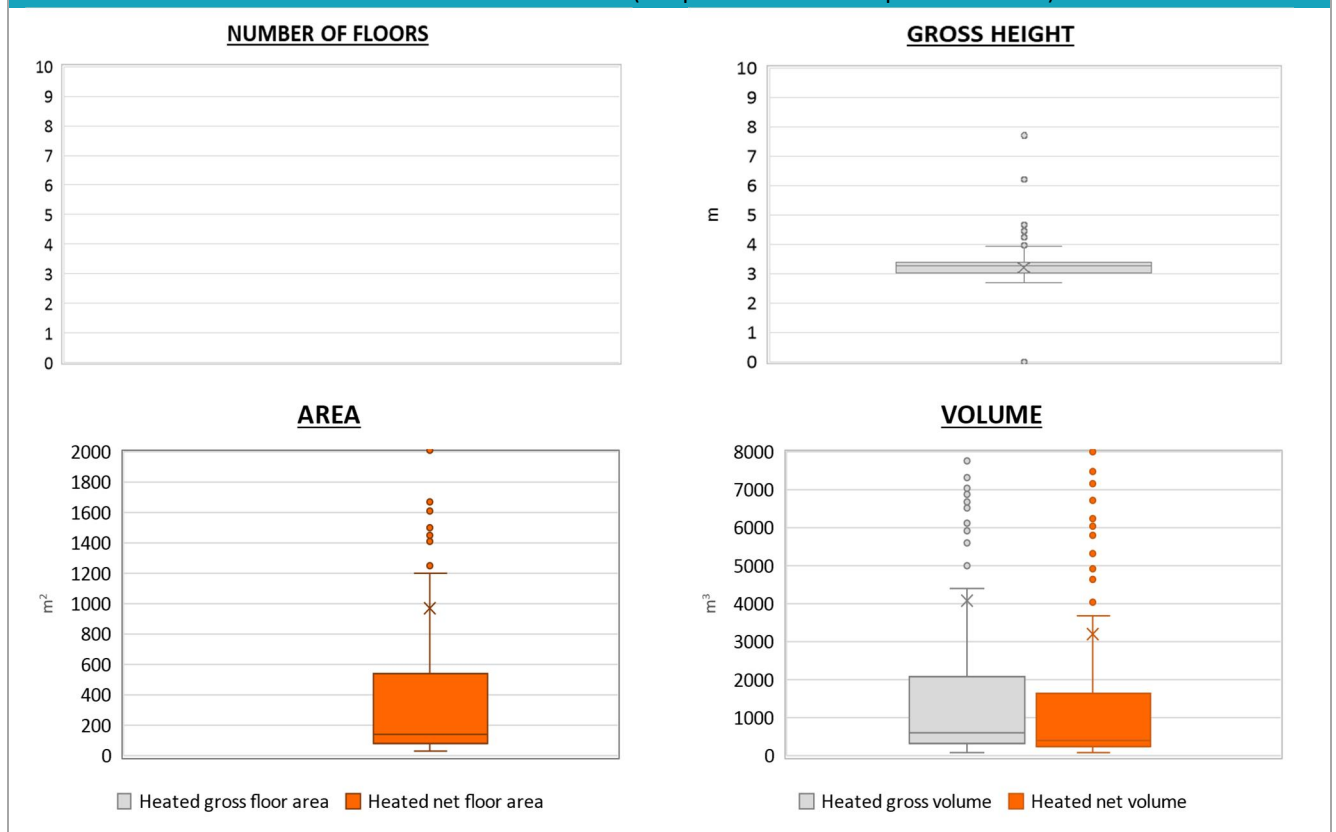

Region:	Liguria	Archetype code: RES_BLDGS_ 1971-1980_D_LIG
Building category:	Residential buildings – Entire multifamily blocks	
Period of construction:	1971-1980	
Climatic zone:	D	
Number of records:		321

### Additional data: other numerical variables that are not included in the archetype

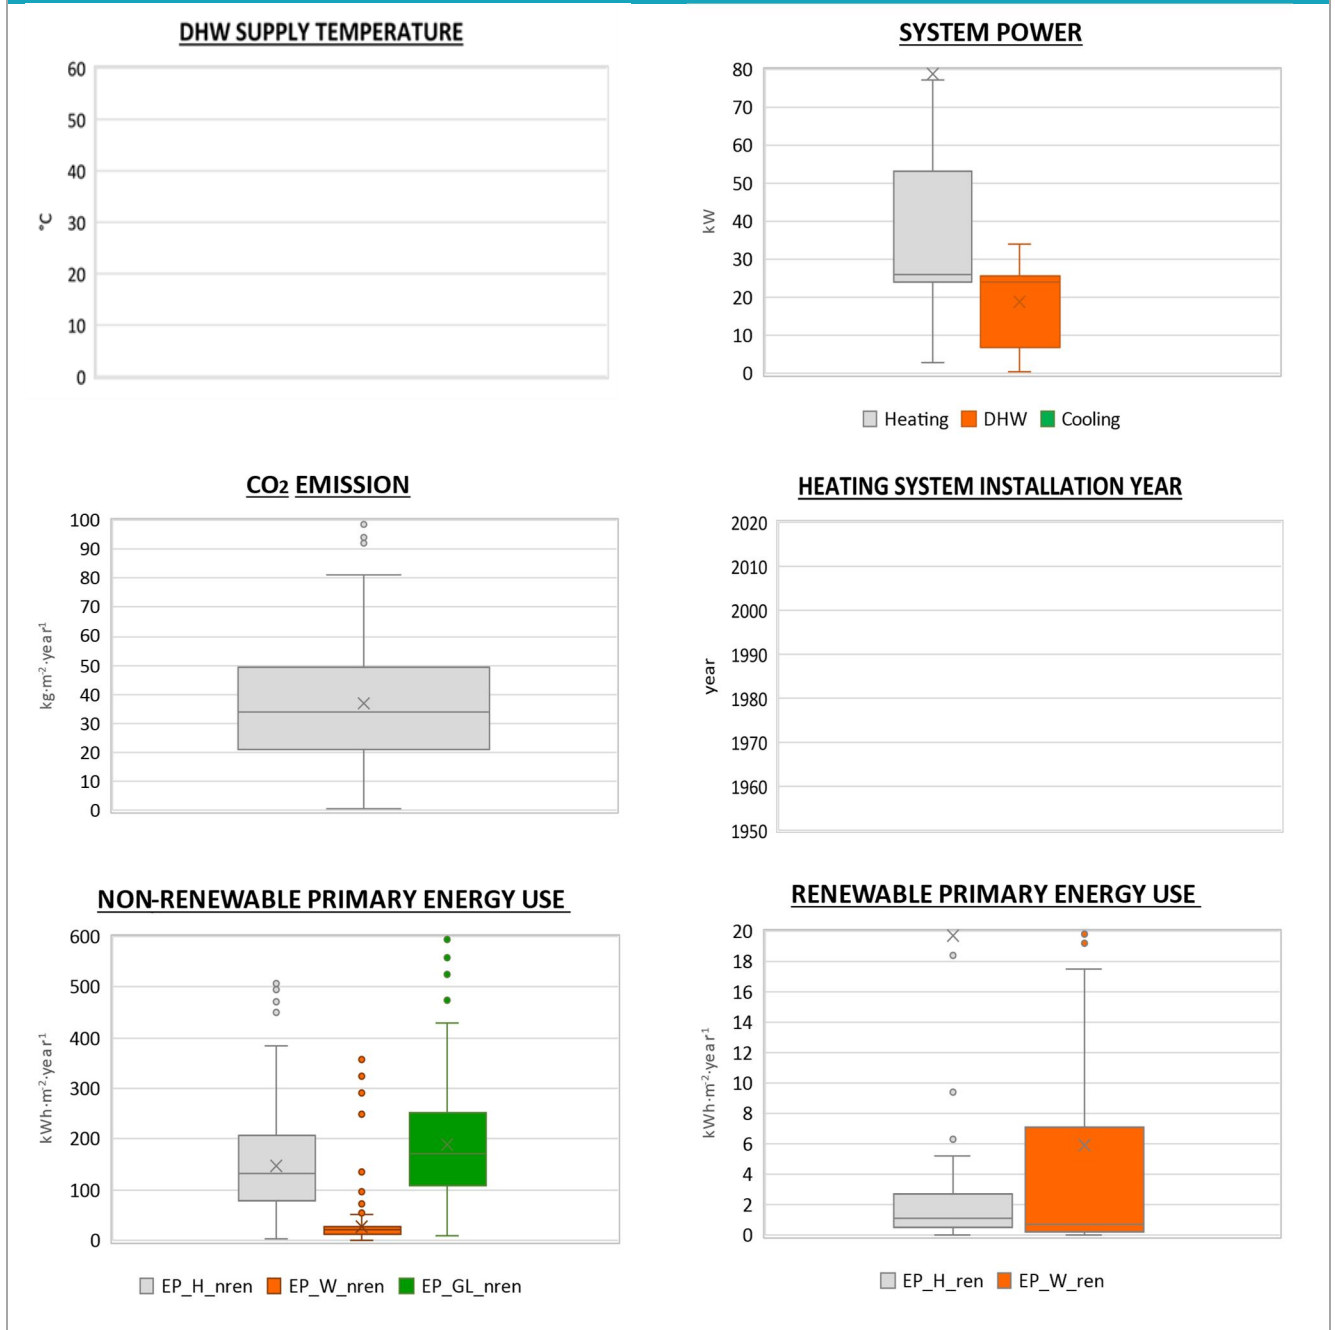

NOTE: Sample size of the analysed data.

Compactness ratio: 321; Window to useful floor area ratio: 65; U-value of the roof: 149; U-value of the wall: 294; U-value of the floor: 70; U-value of the windows: 321; Inter-storey height: 308; Heated net floor area: 308; Heated gross volume: 308; Heated net volume: 308; Total heating power: 145; DHW system power: 189; CO<sub>2</sub> Emission: 308; EP\_H\_nren: 321; EP\_W\_nren: 273; EP\_GL\_nren: 321; EP\_H\_ren: 258; EP\_W\_ren: 208